


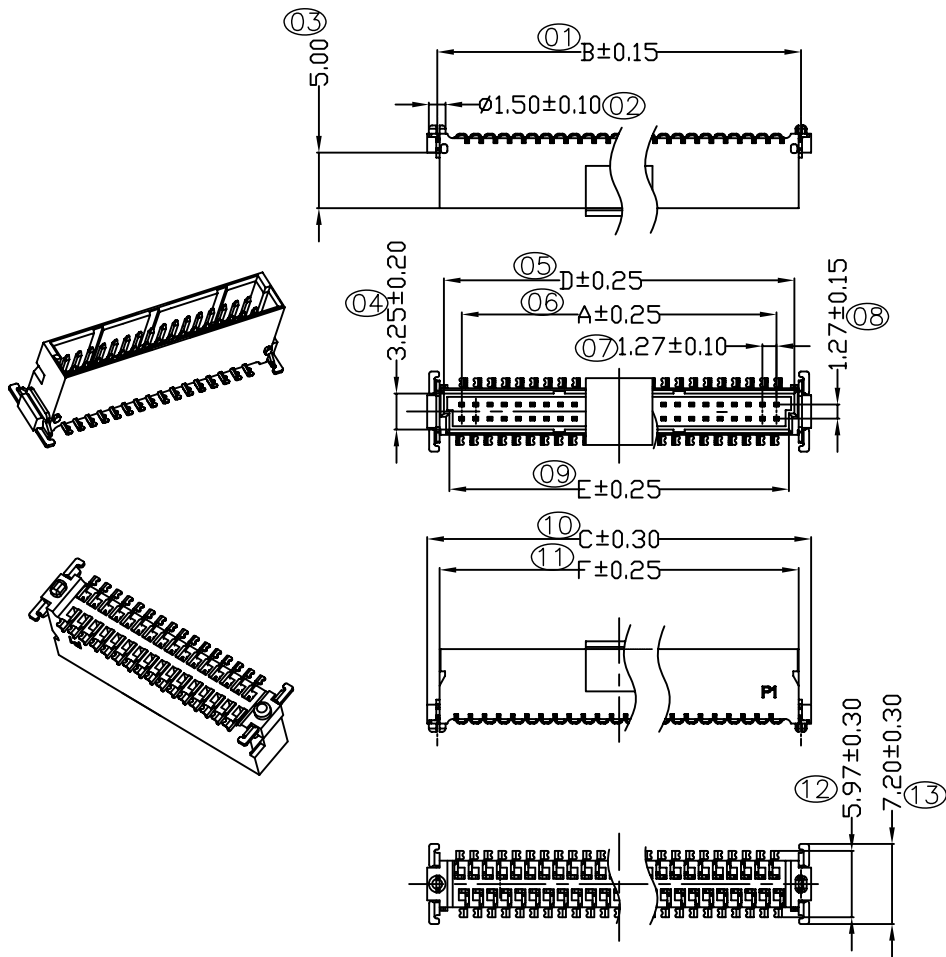

Specifications

Current Rating: 0.8Amp @ 70°C ambient
for 80PIN

Insulation Resistance: 10000MΩ Min.

Dielectric Withstanding Voltage: 500V AC

△ Contact Resistance: 30mΩ Max.


Operating Temperature: -55°C to +125°C

Materials

△ Contact Material: COPPER ALLOY

△ Insulator Material: High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material.
Colour: BLACK

Recommended P.C.Board Layout (Tolerance: ±0.05)

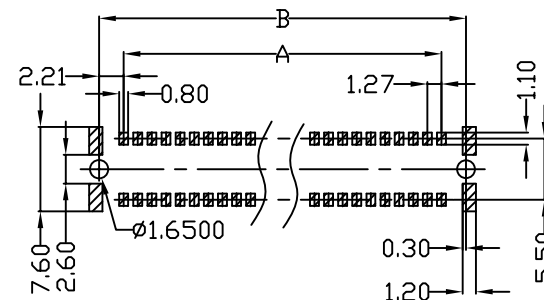

pin 数	Dim. H
25pin ≤	0.12
>25pin	0.15

PIN NO.	A	B	C	D	E	F
012	6.35	10.77	12.70	9.57	8.57	10.35
026	15.24	19.66	21.60	18.46	17.46	19.24
050	30.48	34.90	36.80	33.70	32.70	34.48
068	41.91	46.33	48.20	45.13	44.13	45.91
080	49.53	53.95	55.80	52.75	51.75	53.53

RoHS Compliant

TOLERANCES ARE

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

HAUB-PV17PC-xxx-LF

SERIES

MALE

POST

LEADFREE

012~080WAY

CAP

UNMATED HIGH 1.7mm

180°SMT

DESCRIPTION: Pitch 1.27 male Connector SMC Q TYPE SMT TYPE HIGH6.70mm 180°

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com