

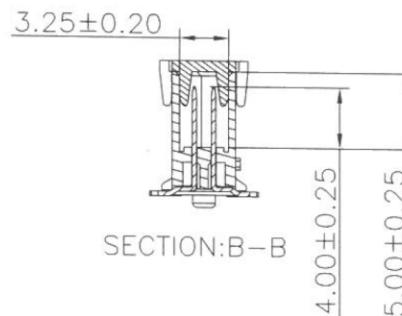
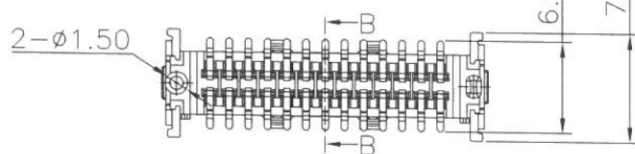
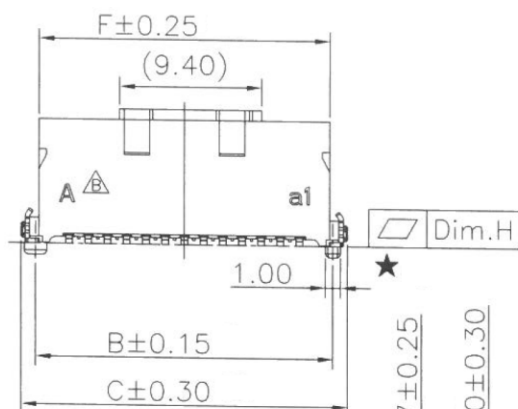


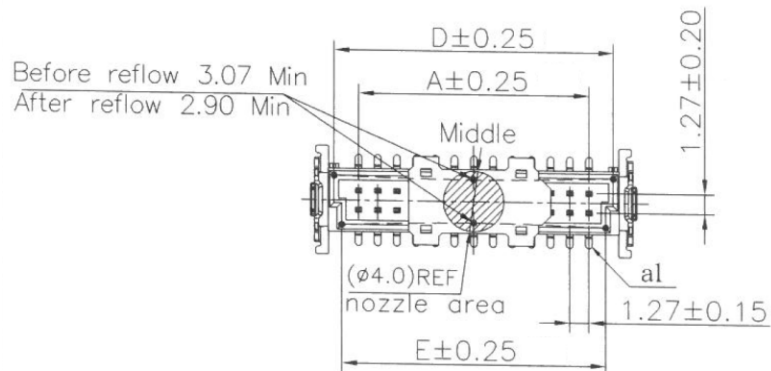


Pin No.	Dim.H
≤25pin	0.12
>25pin	0.15

PIN NO.	A	B	C	D	E	F
2*05	5.08	9.50	11.43	8.30	7.30	9.08
2*06	6.35	10.77	12.70	9.57	8.57	10.35
2*08	8.89	13.31	15.24	12.11	11.11	12.89
2*10	11.43	15.85	17.78	14.65	13.65	15.43
2*13	15.24	19.66	21.59	18.46	17.46	19.24
2*16	19.05	23.47	25.40	22.27	21.27	23.05
2*20	24.13	28.55	30.48	27.35	26.35	28.13
2*25	30.48	34.90	36.83	33.70	32.70	34.48
2*34	41.91	46.33	48.26	45.13	44.13	45.91
2*40	49.53	53.95	55.88	52.75	51.75	53.53

Specifications
 Current Rating:1.70Amp/PIN.
 Insulation Resistance:10000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:25mΩMax.
 Operating Temperature:-55°C to +125°C
 Materials
 Contact Material:Copper Alloy
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP
 or the equivalent material
 Colour:Black

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

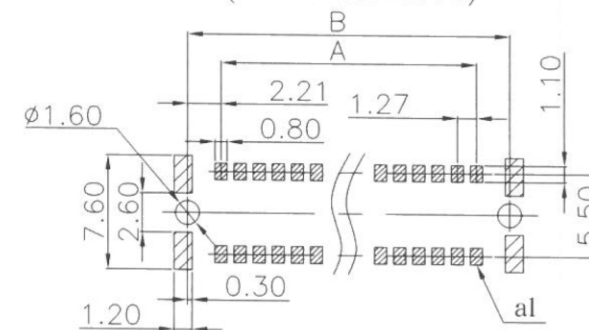

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

HAUB-PV32PC-xxx-LF

SERIES LEADFREE
 010~080WAY
 MALE POST UNMATED HIGH 3.2mm
 180°SMT

DESCRIPTION: