

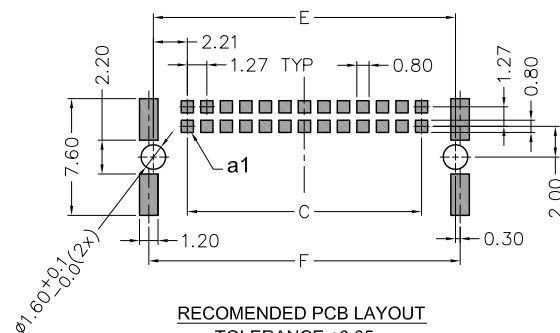
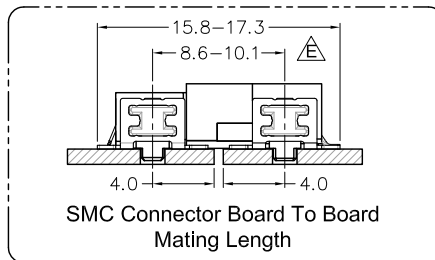
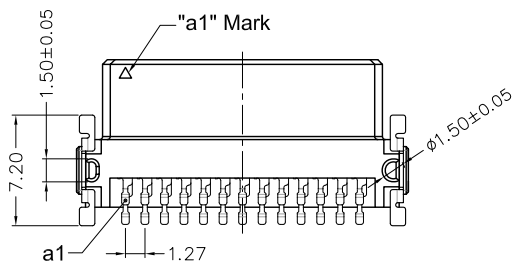

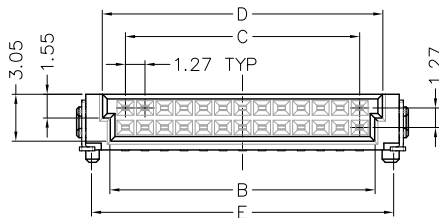
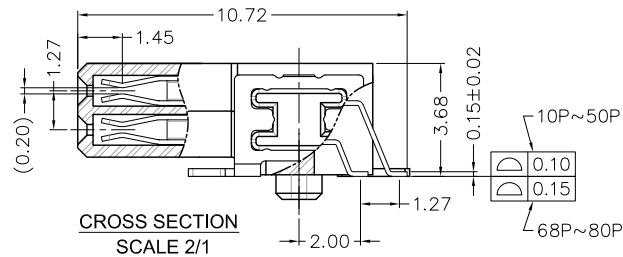


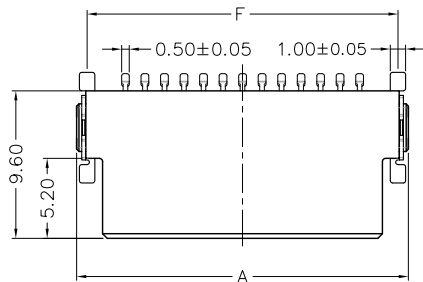

Specification

Insulator Material:	High Temp. Thermoplastic, UL94V-0.
Contact Material:	Phosphor Bronze.
Board Lock Material:	Brass.
Contact Plating:	Au on Contact Area.
	Sn (100μ" Min.) on Solder tail.
	Nickle (Contact - 80μ" Min. / Solder tail - 50μ" Min.)
	Sn(100μ" Min.) over Nickel (40μ" Min.)
	1.7A Max.
Board Lock Plating:	25 Milliohms Max.
Current Rating:	1000 Megohms Min.
Contact Resistance:	500V AC for 1 Minute.
Insulator Resistance:	-55°C ~ +125°C.
Dielectric Withstanding:	230°C for 30~60 seconds.
Operating Temperature:	260°C for 10 seconds.
Max. Processing Temp.:	



DIM-TABLE

PIN NO.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
10	11.43	7.10	5.08	8.10	9.50	10.07
12	12.70	8.37	6.35	9.37	10.77	11.34
16	15.24	10.91	8.89	11.91	13.31	13.88
20	17.78	13.45	11.43	14.45	15.85	16.42
24	20.32	15.99	13.97	16.99	18.39	18.96
26	21.59	17.26	15.24	18.26	19.66	20.23
30	24.13	19.80	17.78	20.80	22.20	22.77
32	25.40	21.07	19.05	22.07	23.47	24.04
40	30.48	26.15	24.13	27.15	28.55	29.12
50	36.83	32.50	30.48	33.50	34.90	35.47
68	48.26	43.93	41.91	44.93	46.33	46.90
80	55.88	51.55	49.53	52.55	53.95	54.52

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HAUB-SW96P-xxx-LF

SERIES | | | LEADFREE
| | | 010~080WAY
FEMALE | | POST
| | HIGH 9.6mm
90°SMT

DESCRIPTION: