


Connection Diagram

	COLOR	
b1	RED	b1
a1	GRAY	a1
b2	GRAY	b2
a2	GRAY	a2
b3	GRAY	b3
a3	GRAY	a3
b4	GRAY	b4
a4	GRAY	a4
b5	GRAY	b5
a5	GRAY	a5
b6	GRAY	b6
a6	GRAY	a6
....
b10	GRAY	b10
a10	GRAY	a10

Schematic Diagram

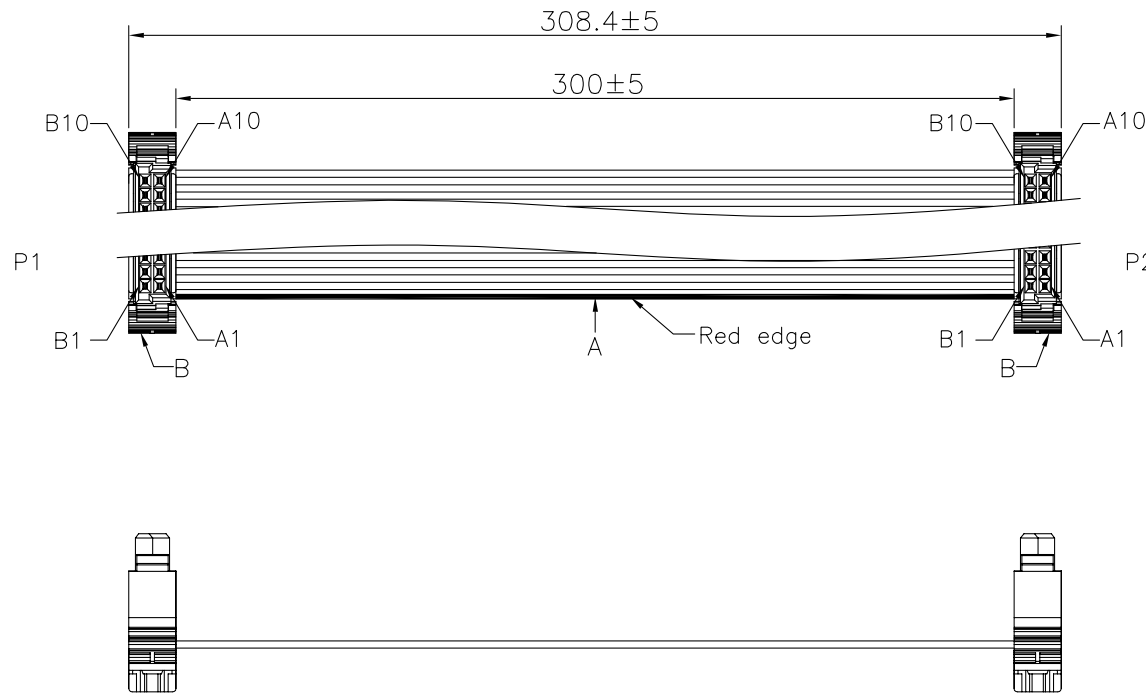

Electrical Test Condition:

- 1.100%Testing:open/Short/Miswire
- 2.Conduction Resistance:5Ω(MAX)
- 3.Insulation Resistance:1000MΩ(MIN)
- 4.High Voltage:300V DC/0.1S
- 5.Operating Temperature Range:-40℃~125℃.
- 6.All materials must meet GREENCONN hazardous substances control standards.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY	CY	X. ± 0.25
CHECKED BY	GENIUS	.X ± 0.20
UNIT / mm	SCALE 1 : 1	.XX ± 0.15
DATE		.XXX ± 0.10
		ANG ±

照片框

ORDER INFORMATION

HAUB2X2-2020F1-F30C-LF

SERIES	LEADFREE
	300mm
	FEMALE TO FEMALE
	F1 TYPE
	20 TO 20 WAY

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: DC PH1.27mm 2*10P TO IDC
PH1.27mm 2*10P Female Locking Latches Cable L=300mm