

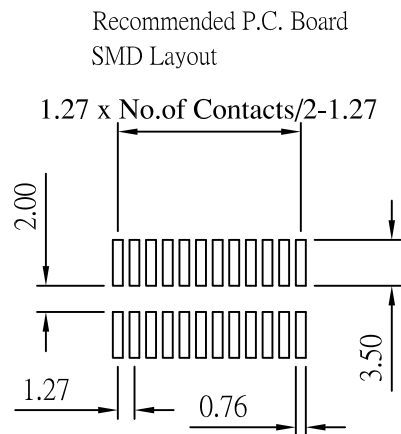


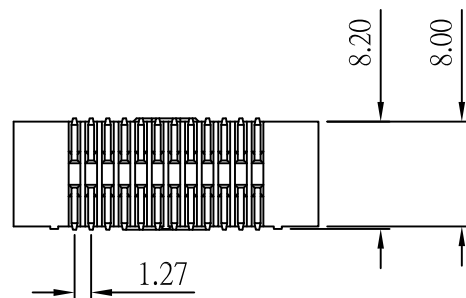

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy (Brass)
Standard: Brass
Insulator Material: High Temperature (Nylon 6T)
Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

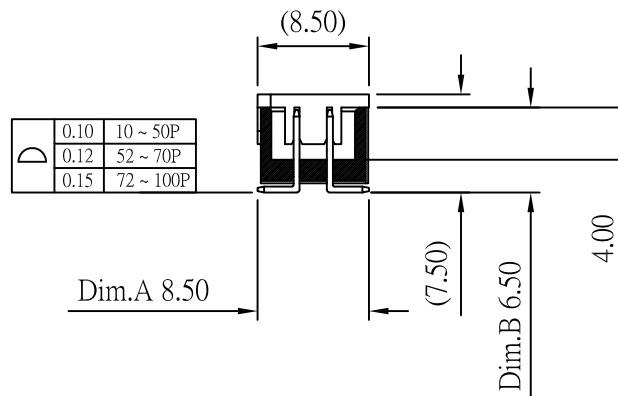

	0.10	10 ~ 50P
	0.12	52 ~ 70P
	0.15	72 ~ 100P