

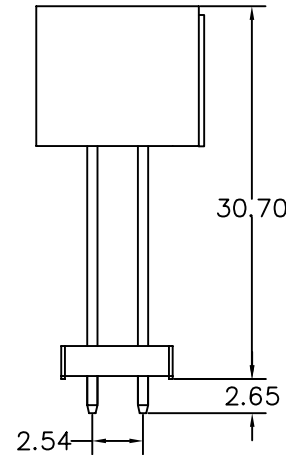


MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
DIELECTRIC WITHSTANDING : AC 500 V
CONTACT RESISTANCE : 20 MOHM MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN

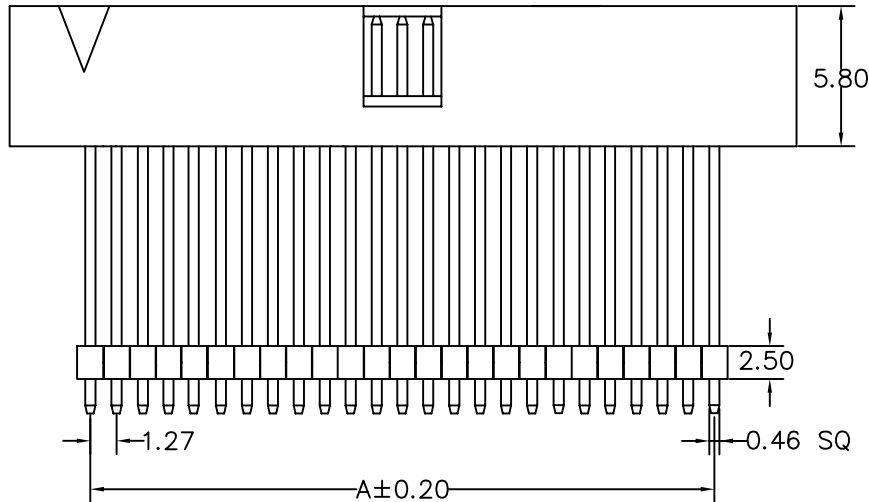

NO. OF POS	A	B	C
8	3.81	11.70	13.10
10	5.08	12.97	14.37
14	7.62	15.51	16.91
16	8.89	16.78	18.18
20	11.43	19.32	20.72
26	15.24	23.13	24.53
30	17.78	25.67	27.07
34	20.32	28.21	29.61
40	24.13	32.02	33.42
44	26.67	34.56	35.96
50	30.48	38.37	39.77
60	36.83	44.72	46.12
64	39.37	47.26	48.66
68	41.91	49.80	51.20
80	49.53	57.42	58.82
100	62.23	70.12	71.52

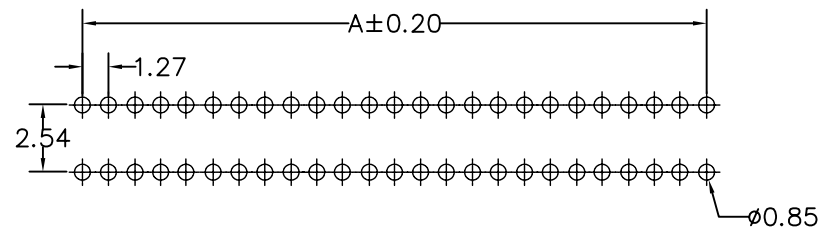

P.C.B LAYOUT

HBS-D307-xxx-LF
 LEADFREE
 008:8WAY
 100:100WAY

RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. HBS-D307-xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:		
DWG NO. HBS-D307-xxx						
FILE NO.		DRAWING BY	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION				

焜倫股份有限公司