

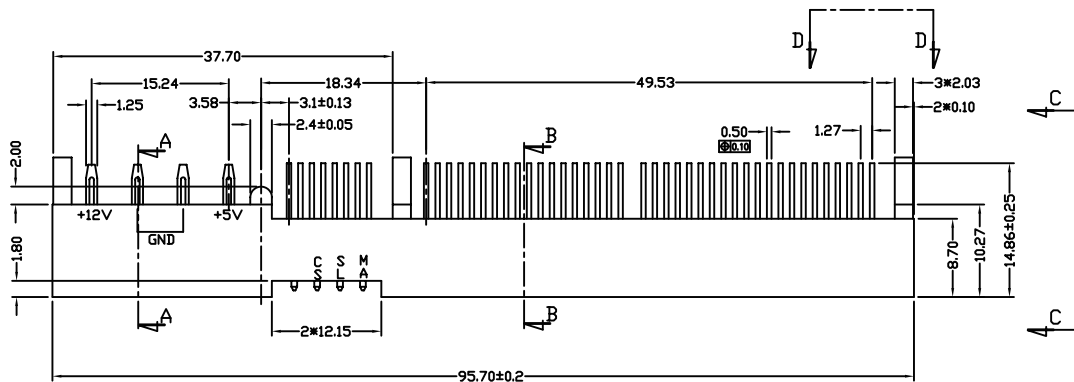



RECOMMENDED P.C.B LAYOUT

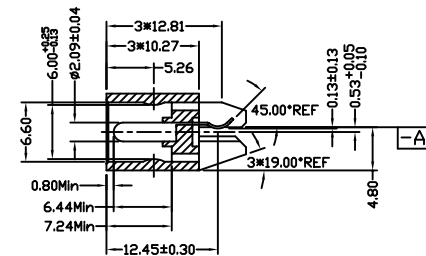


SECTION A-A

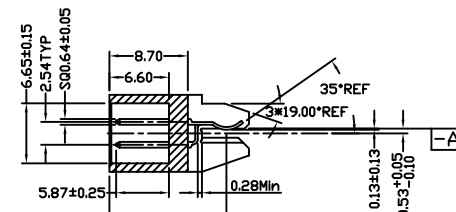

SECTION B-B

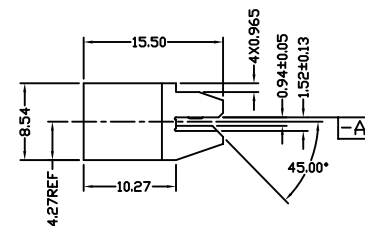

VIEW C-C



SECTION D-D

NOTES:

***MATERIAL:**

HOUSING: 40% GLASS FILLED PPS
BROWN UL 94V-0.

SIGNAL PIN: BRASS C2680 R-H.

FINISH: UNDERPLATING 50uin MIN NICKEL.

CONTACT AREA: 3uin GOLD FLASH OVER.

SOLDER TAIL: 100uin MIN Sn/Pb.

POWER PIN: BRASS C2680 R-H.

100uin MIN Sn/Pb.

OVER 20-30uin NICKEL

UNDERPLATED.

*COPLANARITY OF ALL PERMINALS

IS 0.05 TO 0.02 RELATED TO

SEATING PLANE DATUM LINE -A-

*RECOMMENDED THICKNESS OF

PCB: 1.00±0.100mm.

SPECIFICATION:

Current Rating: 3A Max.

Voltage Rating: 250V AC

Dielectric Strength :

Post Contact- 1000V AC for 1 minute.

Power Contact-1500V AC for 1 minute.

Contact Resistance: 20 mΩ Max.

Insulator Resistance: 1000MΩ Min.

Temperature: -45°C to +105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

HC-E-0301-LF

SERIES

EDGE CLIP

3 IN 1

LEADFREE

DESCRIPTION: CONNECTOR-INTERFACE OF 3 IN 1