


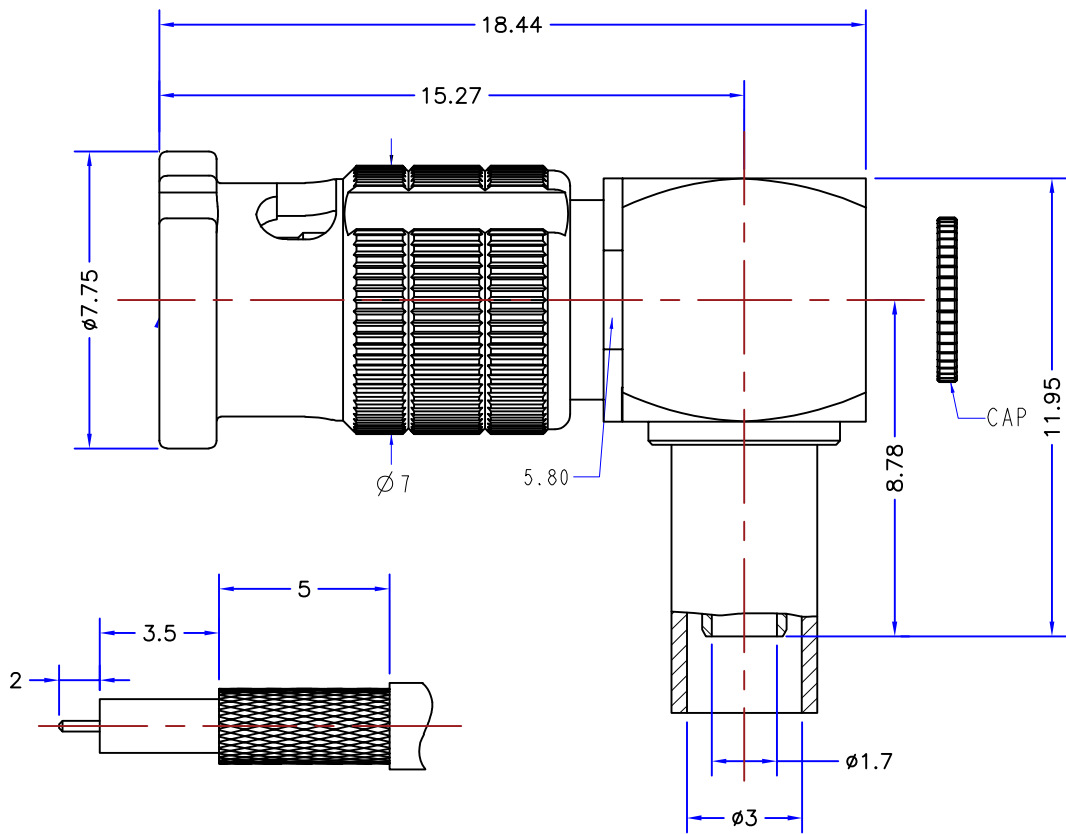

1. 电气特性

- 1.1 阻抗: 50欧姆
- 1.2 工作频率: DC-3 GHz
- 1.3 S. W. R. : 1.5MAX
- 1.4 工作电压: 335V/最大值
- 1.5 绝缘电阻: ≥1000 MΩ

2. 环境保护

- 2.1 工作温度范围: -45℃~+125℃

3	胶芯	铁氟龙		1
2	中心针	黄铜	镀金	1
1	外壳	黄铜	镀镍	1
NO.	规格/描述	材质	外观处理	数量/单位

RoHS Compliant

PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

HDBNC-PCR-316-LF

SERIES

LEADFREE

RG316

90°

CRIMP

MALE

DESCRIPTION: HD BNC right angle plug crimp for RG316 cable 50 ohm