


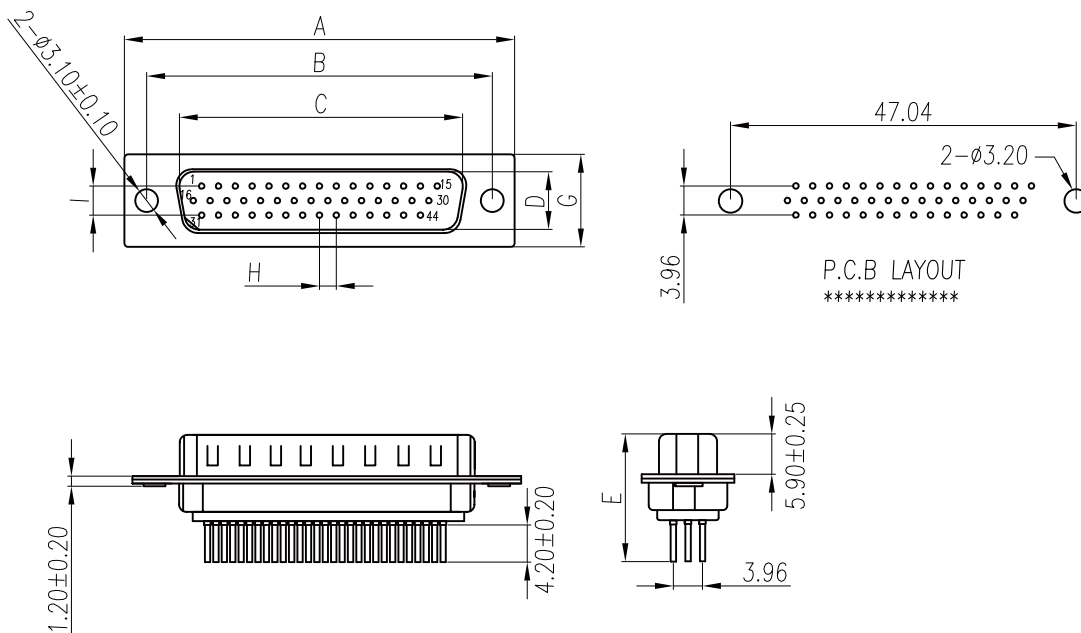

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 m Ω Max.
- 2.4 Insulation resistance: 1000 M Ω Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel,tin or gold plated

J	前鉚型(不通孔)	N	后鉚型(通孔)	ZJ	后鉚型(魚叉)

PART NO	A ± 0.25	B ± 0.25	C ± 0.25	D ± 0.25	E ± 0.25	G ± 0.25	H ± 0.20	I ± 0.20
HDD-PGx-15	30.80	25.00	16.92	8.30	17.00	12.60	2.29	3.96
HDD-PGx-26	39.20	33.32	25.25	8.30	17.00	12.60	2.29	3.96
HDD-PGx-44	53.05	47.04	38.96	8.30	17.00	12.60	2.29	3.96
HDD-PGx-62	69.40	63.50	55.42	8.30	17.00	12.60	2.41	3.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HDD-PGx-xx-LF

SERIES

LEADFREE

15-62 WAY

J: JACKSCREW

N: REAR/NUT

MALE

ZJ: LOCK+JACKSCREW

GOLD

DESCRIPTION: