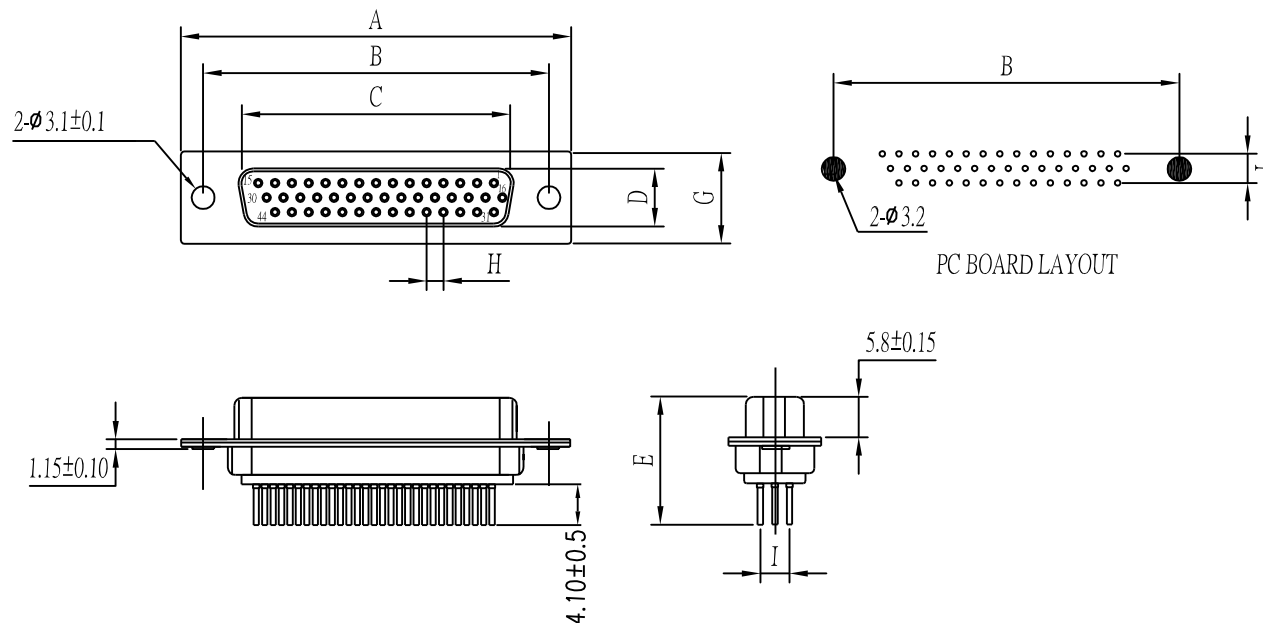




Note:

1.Material:




- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Copper alloy,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 8.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel,tin or Zinc plated

J	前鉗型(不通孔)	N	后鉗型(通孔)	ZJ	后鉗型(魚叉)
					

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.50	F±0.25	G±0.25	H±0.05	I ±0.20
HDD-SGx-15	30.81	24.99	16.33	7.9	16.2		12.55	2.29	3.96
HDD-SGx-26	39.25	33.32	24.66	7.9	16.2		12.55	2.29	3.96
HDD-SGx-44	53.04	47.04	38.38	7.9	16.2		12.55	2.29	3.96
HDD-SGx-62	69.50	63.50	54.84	7.9	16.2		12.55	2.41	3.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDD-SGx-xx-LF
SERIES | | | LEADFREE
15-62WAY
FEMALE | J:JACKSCREW
FULL GOLDN:REAR/NUT
ZJ:CLIP+JACKSCREW

DESCRIPTION: