


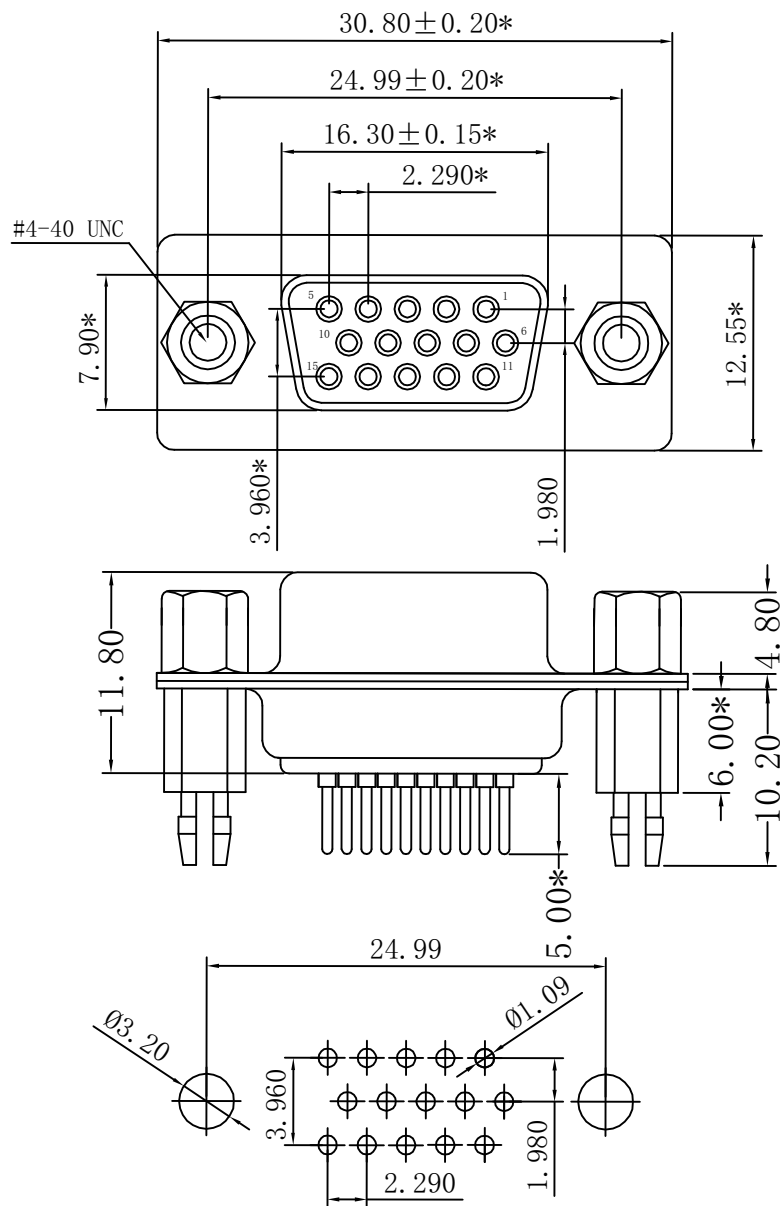


MATERIAL:

1. Insulator: PBT+30%Glass Fiber (UL94V-0)
2. Contact: Brass
3. Contact Plated: Gold Flash over Tin Or Gold Plated Or Tin Plated
4. Shell: Steel, Nickel Plated

SPECIFICATION:

1. Current Rating: 5 AMPS
2. Insulation Resistance: 1000MΩ MIN. At 500VDC
3. Dielectric Strength: 500V for One minute
4. Operation Temperature: -55° ~ +105° .

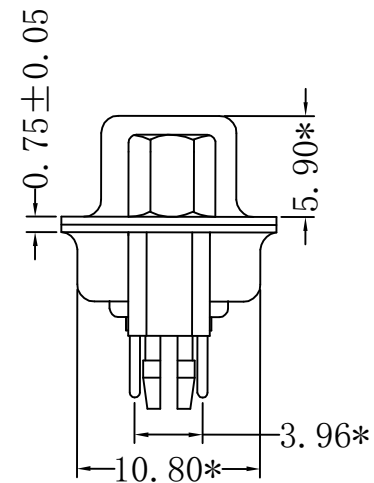

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 1°

SIZE A4

PPOJECTION

ORDER INFORMATION

HDD-SSZJ-15-LF
 SERIES | | | LEADFREE
 | | | 15 WAY
 | | | JACKSCREW
 | | | CLIP
 | | | SEMI GOLD
 | | | FEMALE

DESCRIPTION: D-SUB 15PIN 母座 直立式DIP

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com