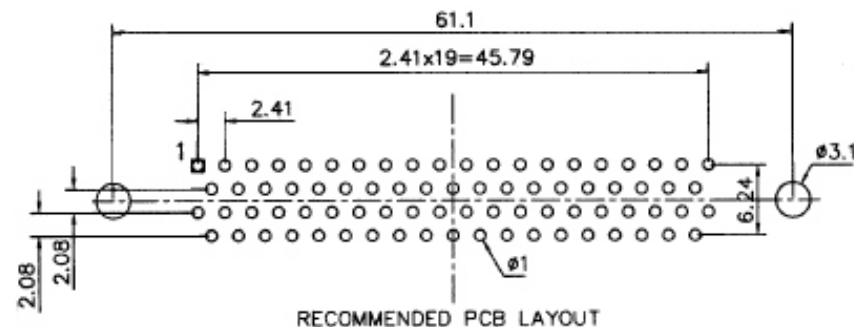
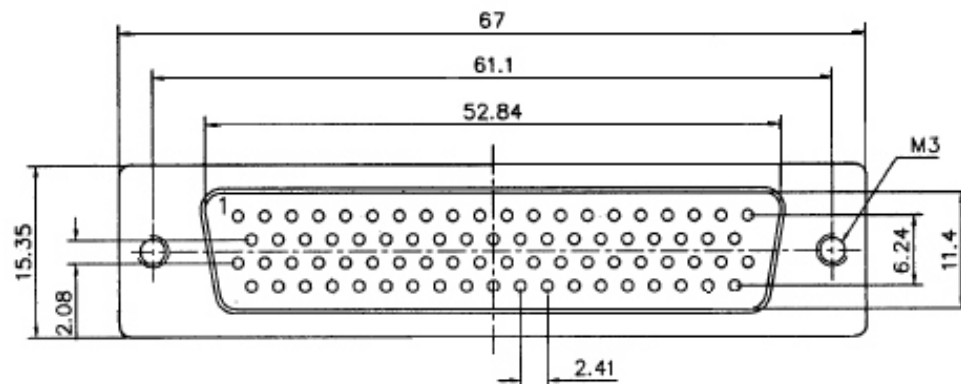


#### ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1A.

Dielectric Withstanding Voltage: AC 1000V r.m.s.

Insulation Resistance: 5000 Megaohms Min. at DC 500V.

Contact Resistance: 25 Miliohms Max.

Operating Temperature: -55°C to +105°C.

#### MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g. Max.

Contact Separation Force: 21 g. Min.

#### MATERIALS:

Contact: Brass with Gold Flash.

Insulator: PBT black, UL 94V-0 Rated.

Shell: Tin Plated Cold Roller Steel.

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG, ±

SIZE A4

PPOJECTION

照片框

#### ORDER INFORMATION

HDDL-PGD75Z68-78-LF

SERIES

LEADFREE

78 WAY

CLIP HIGH 6.8mm

DIP 7.5mm

GOLD

MALE

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com