

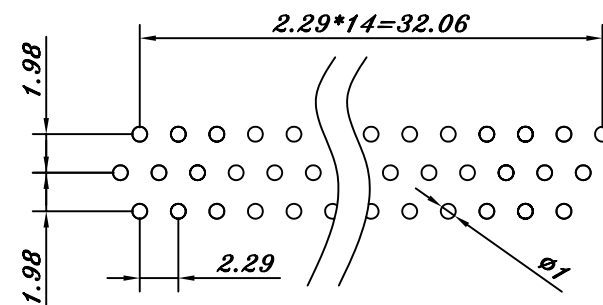
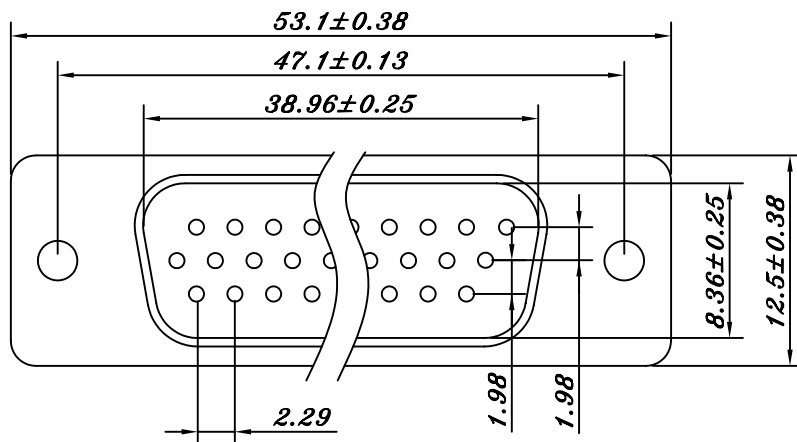
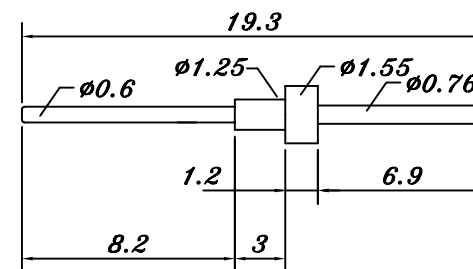


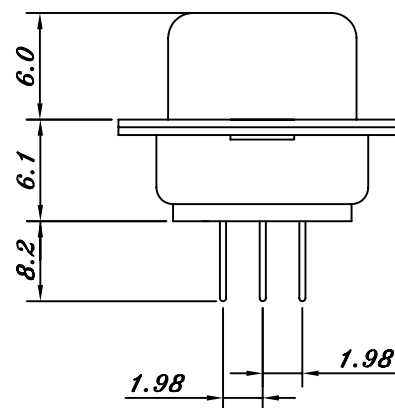

P.C.B. LAYOUT

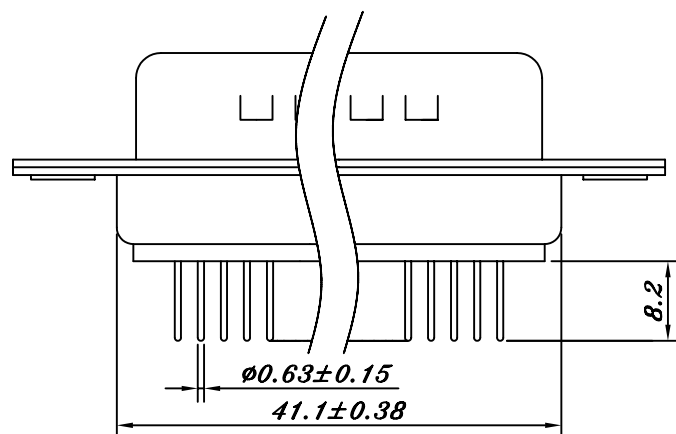

44PIN MALE MACHINED PIN

MATERIAL

Insulator	:PBT+30% Glass Fiber(UL94V-0)
Contact	:Bronze
Contact plated	:Gold Flash over Nickel
Shell	:Steel , Nickel plated

SPECIFICATION

Current Rate	:5 Amps
Insulator Resistance	:1000M Ω Min. at 500V DC
Dielectric Strength	:1000V per minute
Operation Temperature	:-40° to + 105°

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

HDDL-PGD82-44-LF

SERIES T LEADFREE
44 WAY
DIP 8.2mm
GOLD
MALE

DESCRIPTION: D-SUB CONNECTOR STRAIGHT TYPE HIGH DENSITY MACHINED PIN