
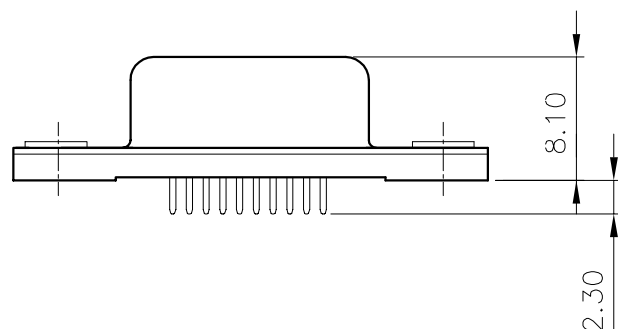
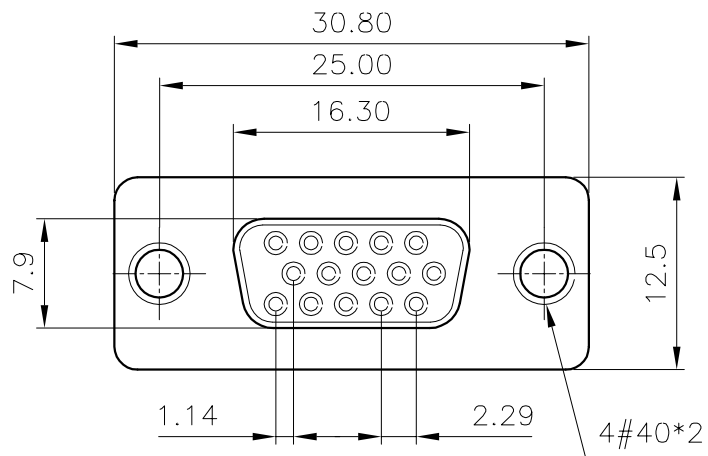


RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-1.

Contacts: PHOSPHOR BRONZE

CONTACT PLATING

Gold On Mating Length 100u" Tin On Solder Tails

ELECTRICAL

Current rating: 2.5A MAX.

Contact resistance: 15 mohms max.

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 600 VAC / minute

MECHANICAL

Operating temperature: -40°C TO $+105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HDDM-SSN-15-LF

SERIES T T T LEADFREE
15 WAY
NUT
SEMI GOLD
FEMALE

DESCRIPTION: D-SUB HIGH DENSITY P.C.B STRAIGHT (FOR NOTE BOOK)