

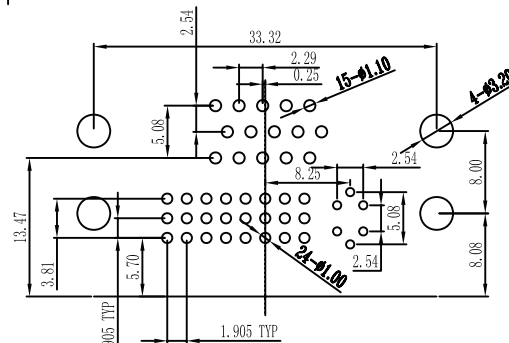

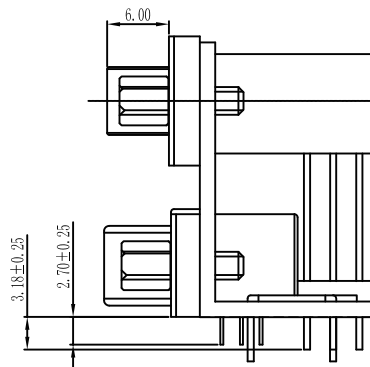


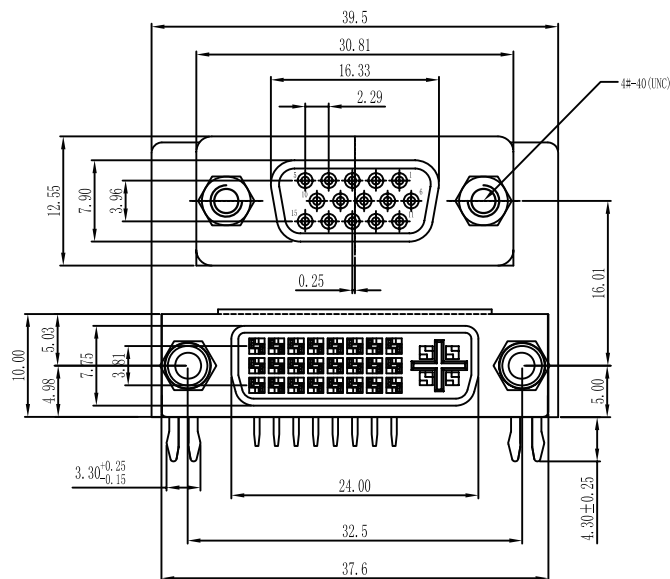

RECOMMENDED P.C.B HOLE LAYOUT

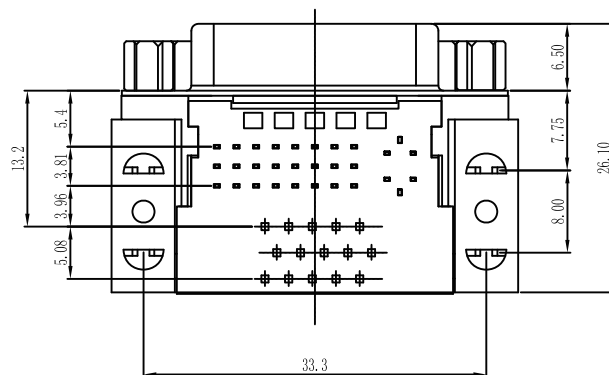

1. MATERIAL:
 - 1.1 DVI Housing: PA 66, UL94V-0
DVI Cover: PA 66, UL94V-0
DVI Housing And DVI Cover Color: White.
 - 1.2 D-SUB Housing: PBT, UL94V-0
D-SUB Cover: PBT, UL94V-0
D-SUB Housing And D-sub Cover Color: Blue.
 - 1.3 Contact: Copper Alloy, Selective 1u"Min Gold Plated In
Contact Area, 80u"Min. Tin Plated In Solder Area,
30u"Min. Nickel Unerplated Overall.
 - 1.4 DVI Shell: Steel, 50u"Min. Nickel Plated Overall.
 - 1.5 D-SUB Shee: Steel, 50u"Min. Nickel Plated Overall.
 - 1.6 Board Lock: Copper Alloy, 80u"Min. Tin Plated Overall.
 - 1.7 Holder: Steel, 50u"Min Nickel Plated Overall
 - 1.8 Screw: Copper Alloy, 50u"Min Nickel Plated Overall
- 2.1 Electrical Characteristics(DVI):
 - 2.1-1 Current Rating: 1 AMP.
 - 2.1-2 Contact Resistance: 2Ω Max.
 - 2.1-3 Insulation Resistance: 2MΩ Min. at DC 500V
 - 2.1-4 Dielectric Withstanding Voltage: 500V AC.
 - 2.1-5 Operating Temperature: -20°C ~ +80°C .
- 2.2 Electrical Characteristics(D-SUB):
 - 2.2-1 Current Rating: 5 Amp.
 - 2.2-2 Contact Resistance: 2Ω Max.
 - 2.2-3 Insulation Resistance: 100MΩ Min. at DC 500V.
 - 2.2-4 Dielectric Withstanding Voltage: 500V AC For 1 Minute.
 - 2.2-5 Operating Temperature: -20°C ~ +80°C .
3. NOTES:
 - 3.1 This Component And Its Homogeneous
Subcomponents Are Rohs Compliant.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDDVI-FR15NH-1529-LF

SERIES

FEMALE

NUT

PORT / PORT 15.8mm

LEADFREE

HD 15PIN / DVI 29PIN

HEX SCREW

DIP 90°

DESCRIPTION: