
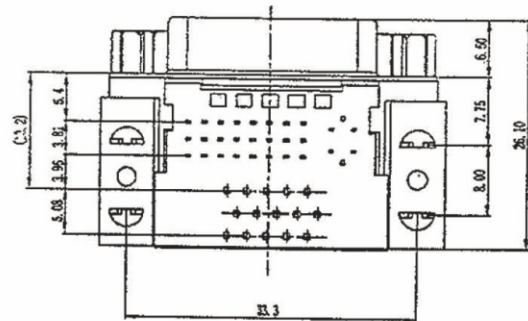
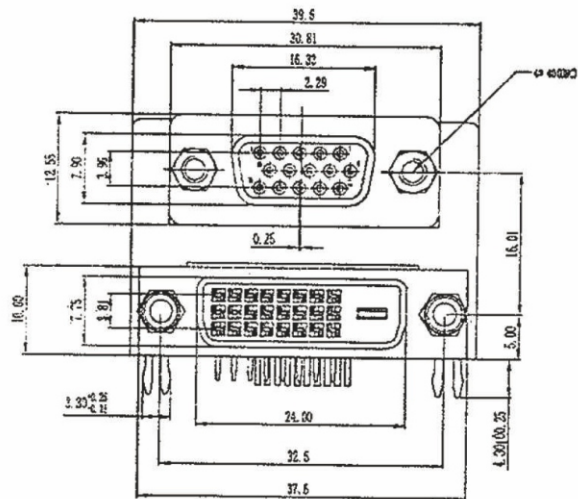
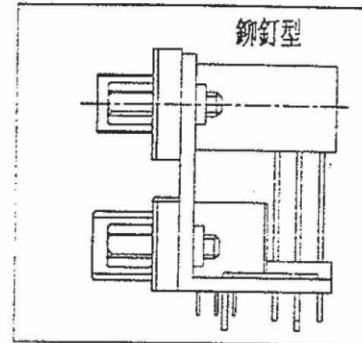


RECOMMENDED P.C.B HOLE LAYOUT

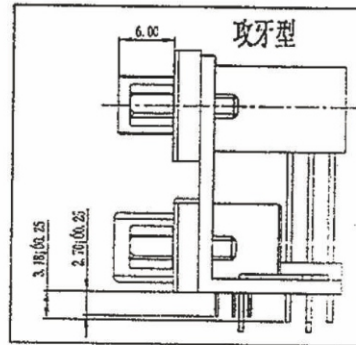

1. MATERIAL:
 - 1.1 DVI Housing: PBT OR NYLON, UL94V-0
 - DVI Cover: PBT OR NYLON, UL94V-0
 - DVI Housing And DVI Cover Color: White
 - 1.2 D-SUB Housing: PBT OR NYLON, UL94V-0
 - D-SUB Cover: PBT OR NYLON, UL94V-0
 - D-SUB Housing And D-sub Cover Color: Black
 - 1.3 Contact: Copper Alloy, Selective in Min Gold Plated in Contact Area, 80u Min Tin Plated in Solder Area, 30u Min Nickel Unplated Overall
 - 1.4 DVI Shell: Steel, 50u Min Nickel Plated Overall
 - 1.5 D SUB Shell: Steel, 50u Min Nickel Plated Overall
 - 1.6 Board Lock: Copper Alloy, 80u Min Tin Plated Overall
 - 1.7 Holder: Steel, 50u Min Nickel Plated Overall
 - 1.8 Screw: Copper Alloy, 50u Min Nickel Plated Overall
2. Electrical Characteristics (DVI):
 - 2.1-1 Current Rating: 1 AMP
 - 2.1-2 Contact Resistance: 22mΩ
 - 2.1-3 Insulation Resistance: 260MΩ at DC 500V
 - 2.1-4 Dielectric Withstanding Voltage: 500V AC
 - 2.1-5 Operating Temperature: 20° C ~ +80° C
- 2.2 Electrical Characteristics (D-SUB):
 - 2.2-1 Current Rating: 5 Amp
 - 2.2-2 Contact Resistance: 22mΩ
 - 2.2-3 Insulation Resistance: 100MΩ at DC 500V
 - 2.2-4 Dielectric Withstanding Voltage: 500V AC For 1 Minute
 - 2.2-5 Operating Temperature: 20° C ~ +80° C
3. NOTES:
 - 3.1 This Component And Its Homogeneous Subcomponents Are RoHS Compliant
 - 3.2 Salt Spray: 48 Hours

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDDVI-FR15NJ-1524-LF

SERIES

FEMALE

NUT

LEADFREE
15 TO 24 WAY
JACKSCRW
SPACING 16.01mm
DIP 90°

DESCRIPTION: RIGHT ANGLE F FEMALE P.C MOUNT