
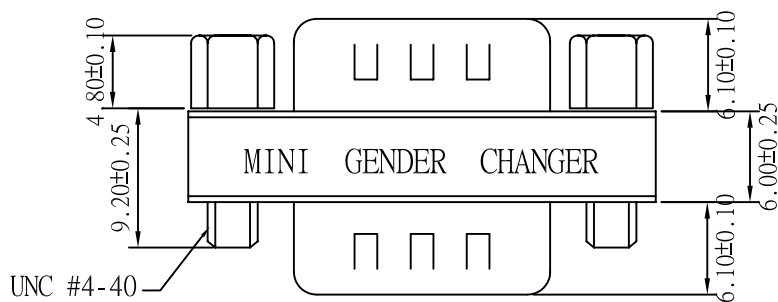




UNC #4-40 Hexscrew



HD 15 M/M GENDER CHANGER

PIN OUT: 15Male

15Male

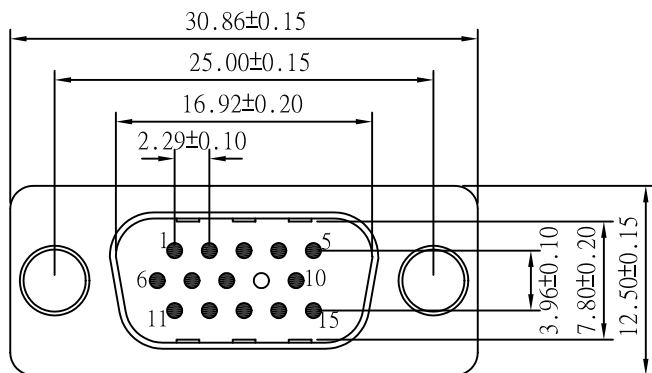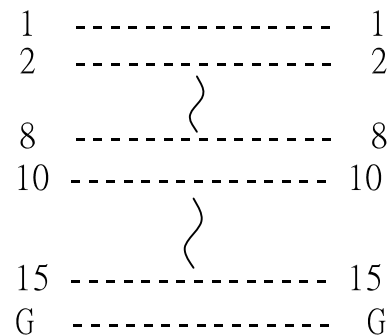

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC FOR ONE Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C — +105°C

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HDHD-MS-1515

DWG NO. HDHD-MS-1515

APPROVED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.20

.XX ± 0.15

.XXX ± 0.05

AWG

AREA

REVISIONS

HK

DATE

焜倫有限公司

UNIT / mm

SCALE 1:1

PROJECTION

