
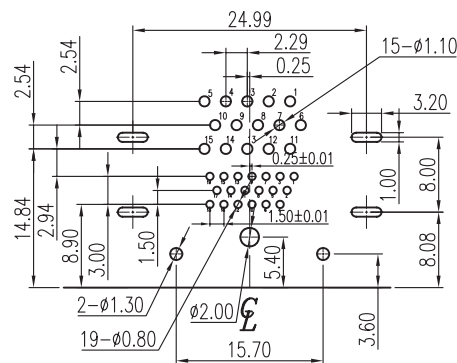
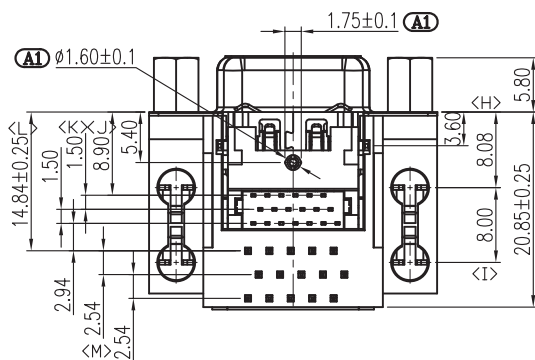
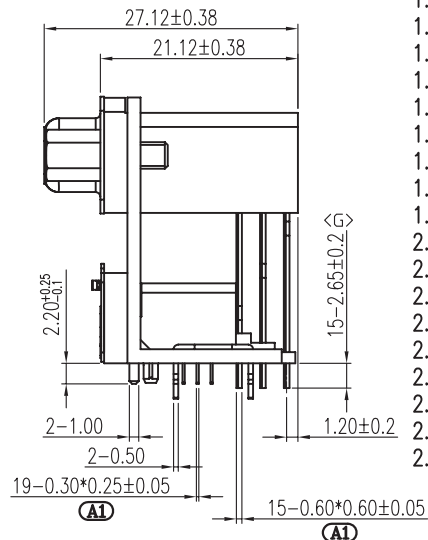


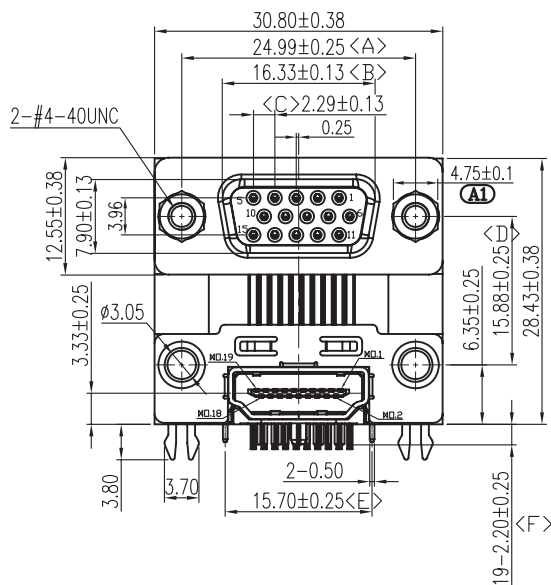


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(M)

SPECIFICATIONS

1. VGA
 - 1.1 Voltage: 250 VAC(RMS) Max.
 - 1.2 Current Rating: 3 Ampere per Contact
 - 1.3 Contact Resistance: 25 Milliohms Max.
 - 1.4 Insulation Resistance: 5000 Megohms Min.
 - 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - 1.6 Total Mating Force: 6.0 Kgf Max.
 - 1.7 Total Unmating Force: 1.2 Kgf Min.
 - 1.8 Operating Temperature: -55°C to +85°C
2. HDMI
 - 2.1 Voltage: 40 VAC(RMS) Max.
 - 2.2 Current Rating: 0.5 Ampere per Contact
 - 2.3 Contact Resistance: 30 Milliohms Max.
 - 2.4 Insulation Resistance: 100 Megohms Min.
 - 2.5 Dielectric Withstanding Voltage: 500V DC(RMS)
 - 2.6 Total Mating Force: 4.5 Kgf Max.
 - 2.7 Total Unmating Force: 1.0 Kgf Min.
 - 2.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
 - Housing(VGA):PBT, UL 94V-0, Color:Blue.
 - Housing(HDMI):LCP, UL 94V-0, Color:Black.
 - Connecting Pedestal:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell(VGA):SPCC.
 - Shell(HDMI):Steel.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Gasket:Stainless Steel.
 - Screw:Copper Alloy.
2. FINISH:
 - Terminal:Gold Plated Over Nickel at Contact Area.
 - Tin Plated Over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

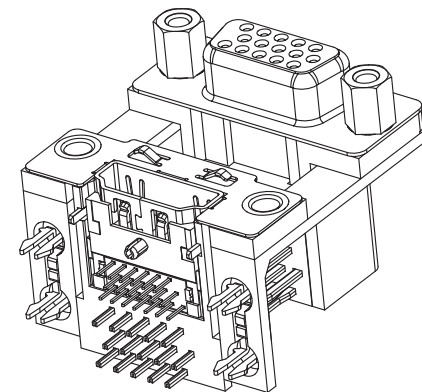

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

X. ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

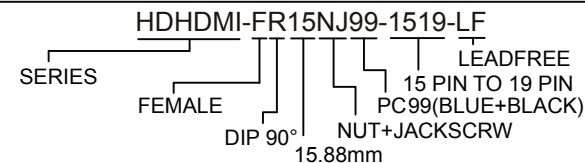

DESCRIPTION: D-SUB HIGH DENSITY 15 FEMALE/HDMI 19-POS. FEMALE DIP TYPE