

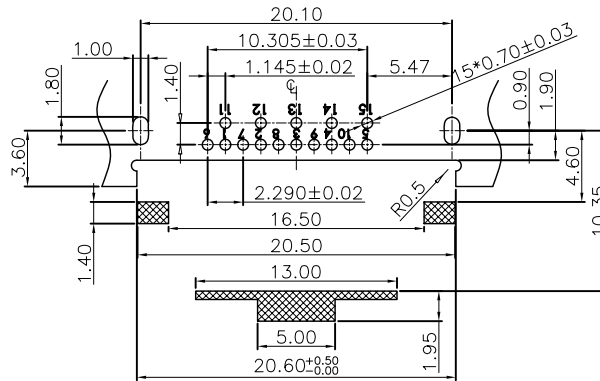
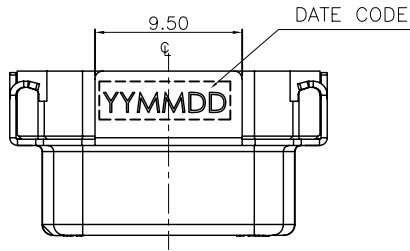

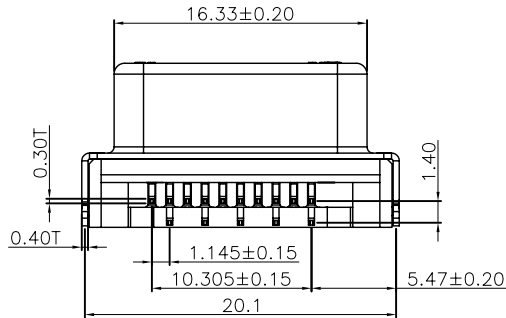





RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.20±0.05mm (TOLERANCE=±0.03)
CAP STAND OFF

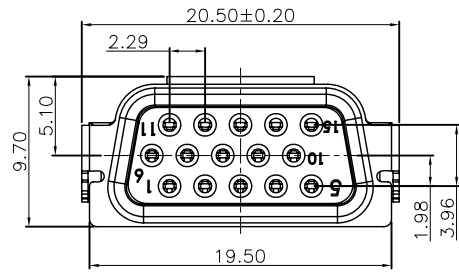

SPECIFICATION

ELECTRICAL

- 1.CONTACT RESISTANCE: 20mΩ MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 3.INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
- 4.RATE CURRENT: 1 A DC.

MATERIAL


- 1.HOUSING: PA9T HF, UL94V-0, COLOR: BLACK
- 2.TERMINAL: BRASS.
- 3.SHELL: SPCC
- 4.CAP: LCP, UL94V-0, COLER: BLACK.

PLATING

- 1.TERMINAL:GOLD FLASH ON CONTACT AREA
80~120u" MATTE TIN PLATED ON SOLDER AREA
50~80u" NICKEL UNDERPLATED ON ALL OVER.
- 2.SHELL: 80~120u" NICKEL PLATED.
50u" MIN COPPER UNDERPLATED ON ALL OVER.

ENVIRONMENT

- 1.LEAD FREE AND RoHS COMPLIANCE
- 2.HALOGEN FREE AVAILABLE

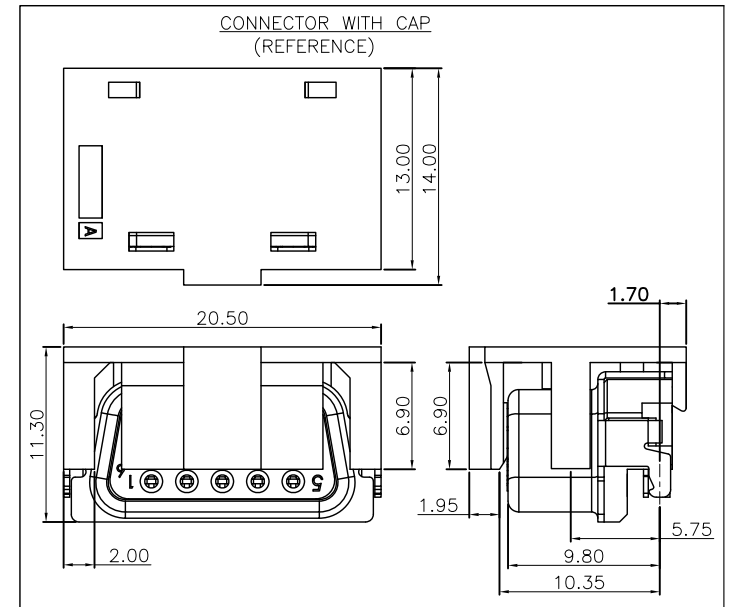

HDL12-SX-15-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HDL12-SX-15

DWG NO. HDL12-SX-15

FILE NO.

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
X. ± 0.3
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG

DESCRIPTION: D-SUB FEMALE DIP TYPE, H=1.2mm

AREA	REVISIONS	DATE
------	-----------	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1