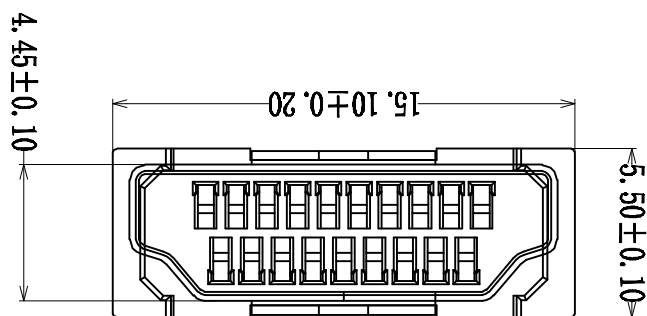
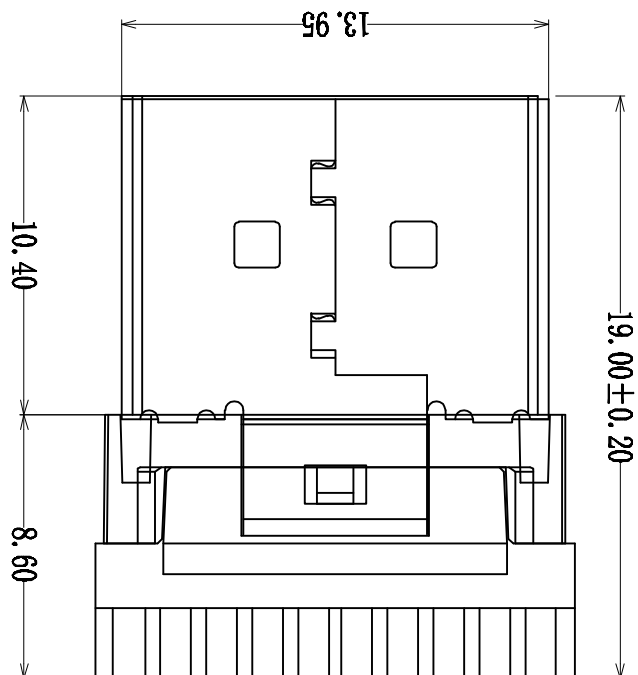


特性: Specifications:

电器: Electrical:

1. 接触阻抗: Contact Resistance
30 milliohms MAX
2. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

材料: Material:

1. 塑胶: Housing: High Temperature Thermoplastics,
LCP 耐高温塑胶
2. 端子: Contact: Copper Alloy 磷铜
3. 铜/铁壳: Shell: Copper Alloy 铜

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
接触点镀金, 脚镀锡.

2. 铜/铁壳: Shell:
Nickel Plating 镀: 金/镍

尺寸: 未注尺寸公差参考±0.10

03	Terminal	C5191	19	Gold plated within connect area ,Tin plated within solder area
02	Housing	LCP	1	UL94-V0, Color is black PBT
01	Shell	SPCC/C2680	1	Plating nickle or gold overall
序号 NO.	品名 PART NAME.	材料 MATERIAL	用量 Q'TY	备注说明 NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.20

.X ± 0.15

.XX ± 0.10

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDMI-PSA-19-LF

SERIES
LEADFREE
19WAY
A TYPE
SOLDER
MALE

DESCRIPTION: HDMI 19P 公 A Type