
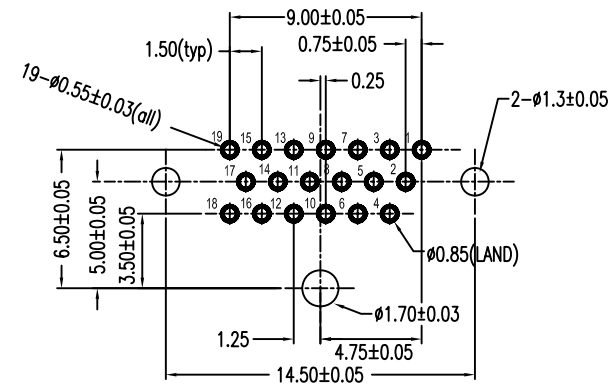
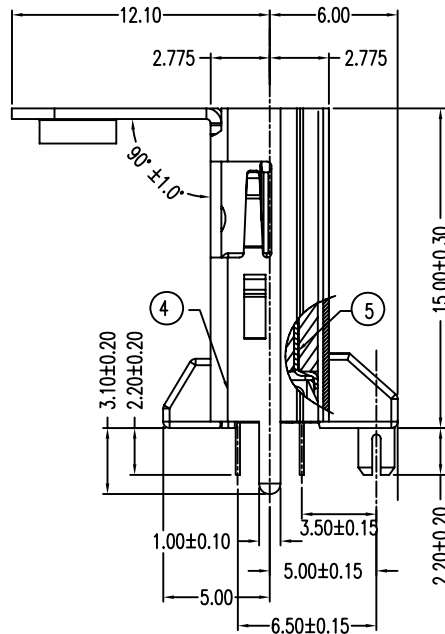
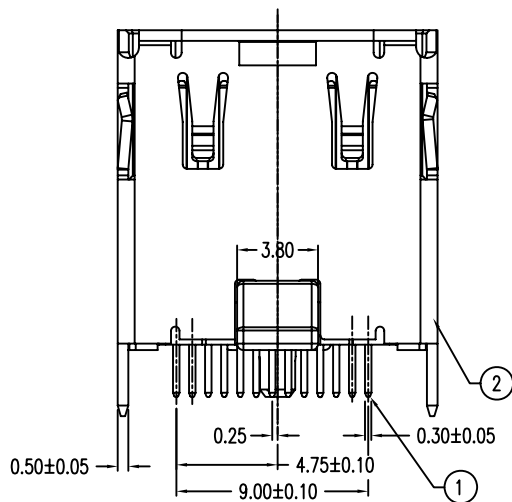


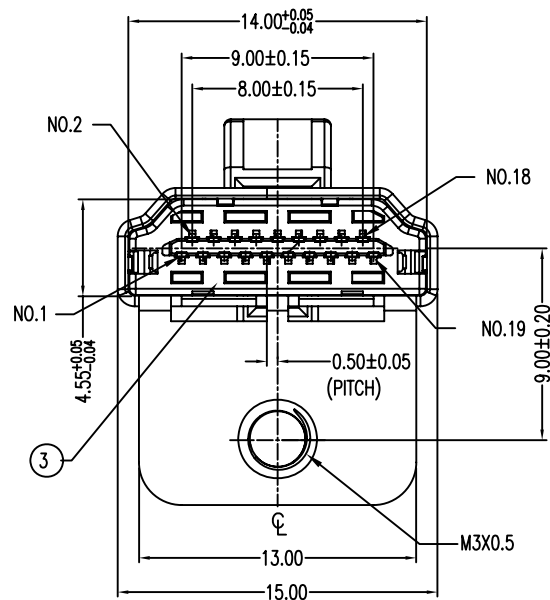

RECOMMENDED PCB LAYOUT(t=1.20±0.15)

5	GROUND	STAINLESS STEEL SUS301 (t=0.20)	
4	COVER	HIGH TEMPERATURE THERMOPLASTICS	30%G.F.,UL94V-0 COLOR:BLACK
3	HOUSING	HIGH TEMPERATURE THERMOPLASTICS	30%G.F.,UL94V-0 COLOR:BLACK
2	SHELL	COPPER ALLOY(t=0.50)	OVER-PLATING:Ni 1um
1	TERMINAL	COPPER ALLOY(t=0.20)	CONTACT AREA:Au 0.76um SOLDER AREA: G/F UNDER-PLATING:Ni 1.25um LIQUID SEALING
ITEM	DESC.	MATERIAL	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SDPN-19-LF

SERIES
LEADFREE
19 WAY
PANEL NUT
DIP 180°
FEMALE

DESCRIPTION: