


No.	Signal Name	No.	Signal Name
1	TMDS Data2+	11	TMDS Clock Shield
2	TMDS Data2 Shield	12	TMDS Clock-
3	TMDS Data2-	13	CEC
4	TMDS Data1+	14	Reserved (in cable but N.C. on device)
5	TMDS Data1 Shield	15	SCL
6	TMDS Data1-	16	SDA
7	TMDS Data0+	17	DDC/CEC Ground
8	TMDS Data0 Shield	18	+5V Power
9	TMDS Data0-	19	Hot Plug Detect
10	TMDS Clock+		

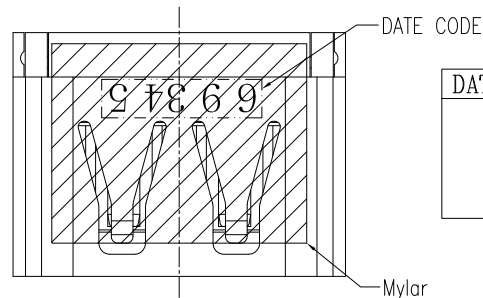

DATE	CODE	DESCRIPTION
	6 9 34 5	
		Friday
		34 Weeks
		Year
		WinWin

NOTES:

*Material




Housing&Spacer:LCP+50%G.F., UL 94V-0 Rated; Color:Black.
Shell: Brass.
Plating: Nickel(40u" Min.) Plating .
Film: PET; Color: Brown.
Contact: Brass.
Plating: Gold plating on contact area;
Tin(100u" Min.) plating on solder tail;
Nickel(40u" Min.) underplating overall.

*Electrical Specification


Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 10 mΩ max.
Insulation Resistance: 100 MΩ min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental



Operating Temperature: -25°C to +85°C

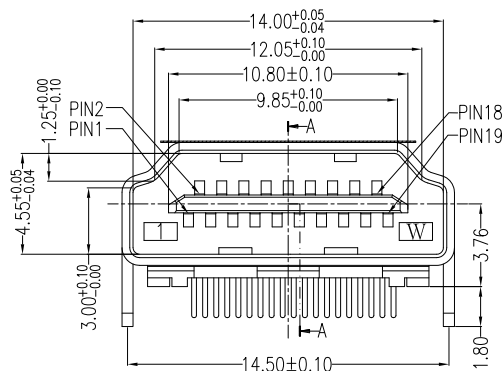


SECT:A-A

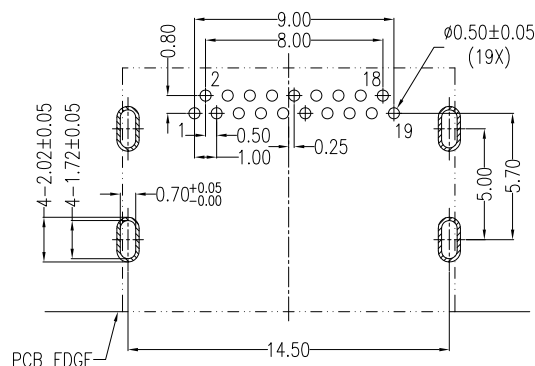

P.C.B LAYOUT(T=1.20mm)
COMPONENT SIDE

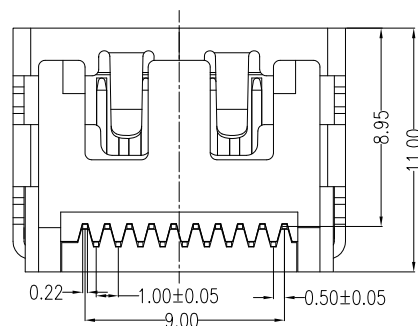

DETAIL B
SCALE 4:1



RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HDMI-SR2RVC-19-LF
SERIES | | | | LEADFREE
| | | | 19 WAY
FEMALE | | | | MYLAR
| | | | REVERSE
| | | | METAL FOOT
| | | | DIP 90°

DESCRIPTION: HDMI 19PIN Reverse Double Rows DIP(1.4)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±