
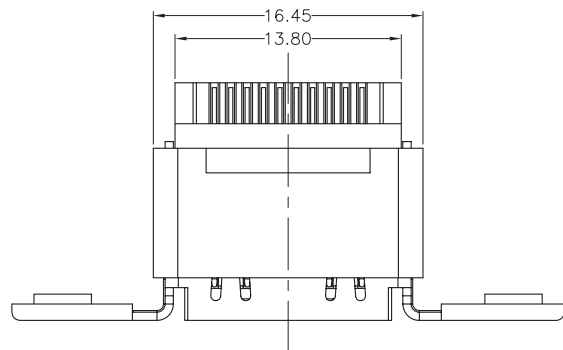
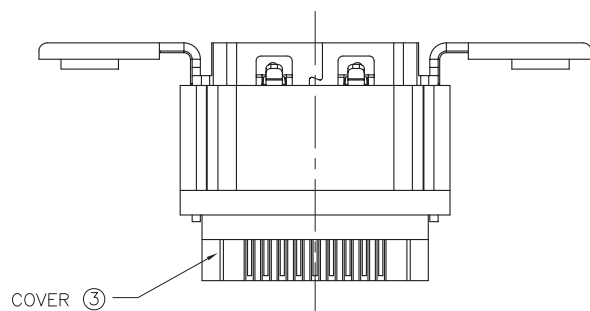
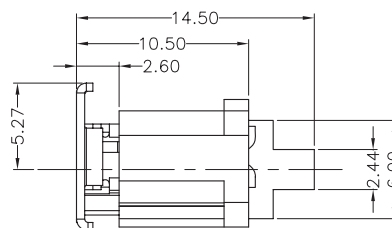


NOTE:

1. ELECTRICAL :
 - 1.1 CONTACT CURRENT RATING: 0.5A MIN.
 - 1.2 VOLTAGE RATING :40V AC (rms)
 - 1.3 WITHSTANDING VOLTAGE: 300 VAC FOR 1 MINUTE.
 - 1.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN.
 - 1.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
2. ENVIRONMENTAL :
 - 2.1 OPERATING TEMPERATURE:-25°C TO +85°C

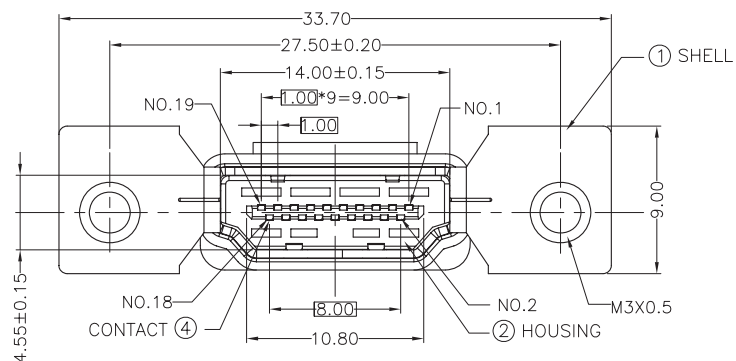

④	CONTACT	19	COPPER ALLOY	GOLD PLATED OVER NICKEL
③	COVER	1	THERMOPLASTIC	UL94V-0
②	HOUSING	1	THERMOPLASTIC	UL94V-0
①	SHELL	1	COPPER ALLOY	GOLD, OR NICKEL PLATING
ITEM	PART NAME	Q'TY/EA	MATETIALS	NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.20
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SSPE-19-LF

SERIES
LEADFREE
19 WAY
PANEL EAR
SOLDER
FEMALE

DESCRIPTION: HDMI RECEPTACLE WITH WING SOLDER TYPE