



NOTE:

1.MATERIAL:

HOUSING: HIGH TEMP.THERMOPLASTIC, UL 94V-0  
COLOR: BLACK.

CONTACT: PHOSPHOR BRONZE, THICKNESS =0.20MM  
SHIELD: BRASS, THICKNESS=0.50MM



2.FINISH:

SEE NOTES.

### 3.ELECTRICAL

- 1.VOLTAGE RATING:40V
- 2.CURRENT RATING:0.5A
- 3.DIELECTRIC STRENGTH:500VAC FOR 1 MINUTE MIN.
- 4.INSULATION RESISTANCE:100MEG OHM MIN.
- 5.CONTACT RESISTANCE:30mill.OHM MAX.

|     |          |             |           |                                  |      |
|-----|----------|-------------|-----------|----------------------------------|------|
| 03  | TERMINAL | CE110163-05 | C5191R-H  | Ni:50u, Au:15u"<br>Au:GOLD FLASH | 9    |
|     |          | CE110164-05 |           |                                  | 10   |
| 02  | SHELL    | SE110161-02 | BRASS     | Ni:50u"Min.                      | 1    |
| 01  | HGS.     | HE110162-01 | LCP E130i | BLACK                            | 1    |
| NO. | NAME     | P/N         | MATERIAL  | FINISH/COLOR                     | QUA. |

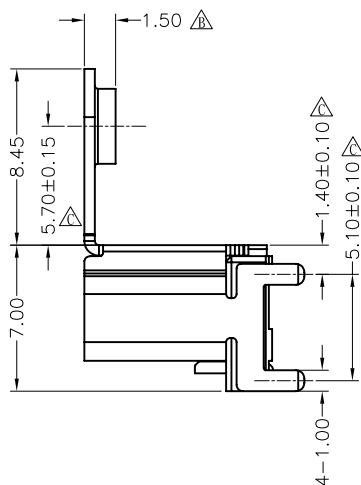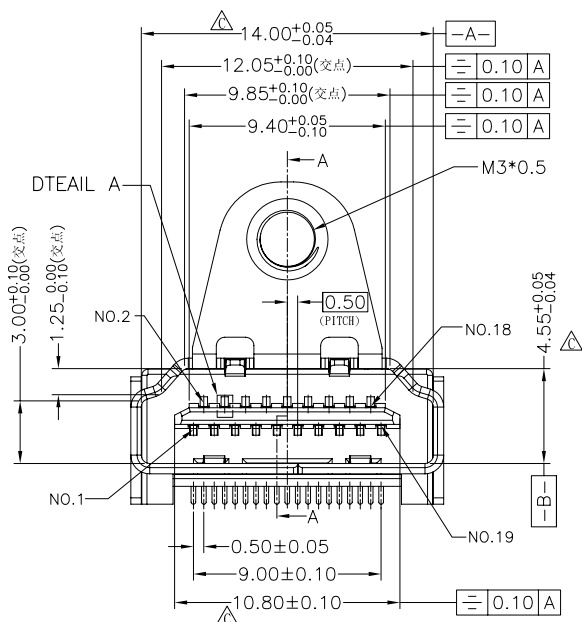

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$ 

CHECKED BY GENIUS

$$.XX \pm 0.10$$

UNIT / mm

.XXX ±  
ANG ±

|         |
|---------|
| SIZE A4 |
|---------|

PPOJECTION 

# 照片框

### ORDER INFORMATION

HDMI-SVMMN-19-LF

SERIES

19WAY

NUT

METAL FOOT

180°SMT

FEMALE

LEADFREE

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

**[www.morethanall.com](http://www.morethanall.com)**