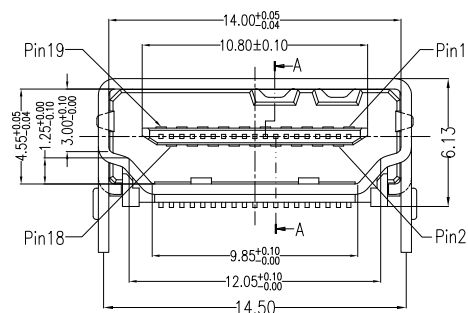


No.	Signal Name	No.	Signal Name
1	TMDS Data2+	11	TMDS Clock Shield
2	TMDS Data2 Shield	12	TMDS Clock-
3	TMDS Data2-	13	CEC
4	TMDS Data1+	14	Reserved (in cable but N.C. on device)
5	TMDS Data1 Shield	15	SCL
6	TMDS Data1-	16	SDA
7	TMDS Data0+	17	DDC/CEC Ground
8	TMDS Data0 Shield	18	+5V Power
9	TMDS Data0-	19	Hot Plug Detect
10	TMDS Clock+		

NOTES:

*Material



Housing: LCP, UL 94V-0 Rated; Color: Black.
 Shell: Brass.
 Plating: Ni(40u" Min.) Plating .
 Contact: Brass.
 Plating: Au plating on contact area;
 Sn(100u" Min.) plating on solder tail;
 Ni(40u" Min.) underplating overall.

*Electrical Specification


Operation Voltage: 40 VAC Max.
 Current Rating: 0.5 Ampere per contact
 Contact Resistance: 10 mΩ Max.
 Insulation Resistance: 100 MΩ Min.
 Dielectric Withstanding Voltage: 500 VAC

*Environmental



Operating Temperature: -20°C to +85°C

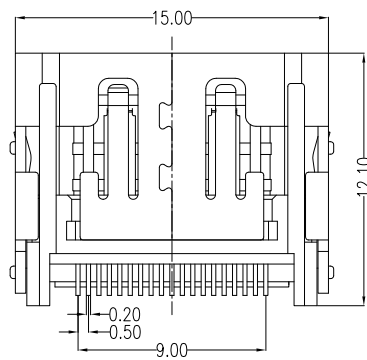

SECT:A-A

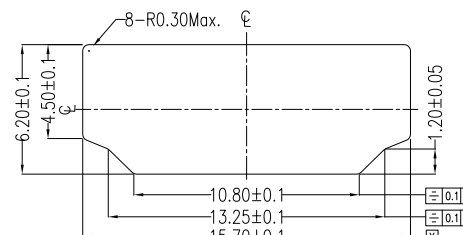

REFERENCE PANEL CUT OUT DIMENSION

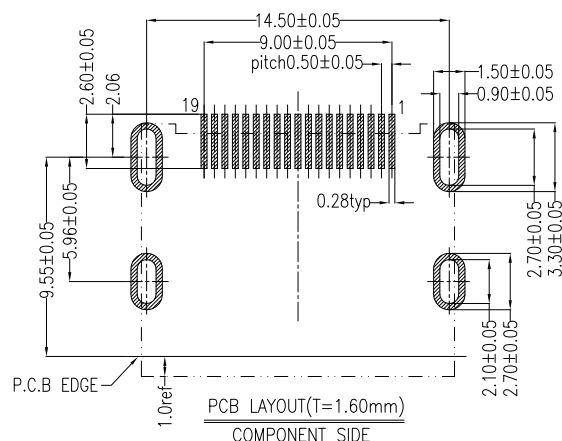

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 3°

照片框

ORDER INFORMATION

HDMI-SW-19-LF
 SERIES T LEADFREE
 19 WAY
 90°SMT
 FEMALE

DESCRIPTION: High Definition Media Interface 19Pin SMT Type(No Posts) (Molding)