
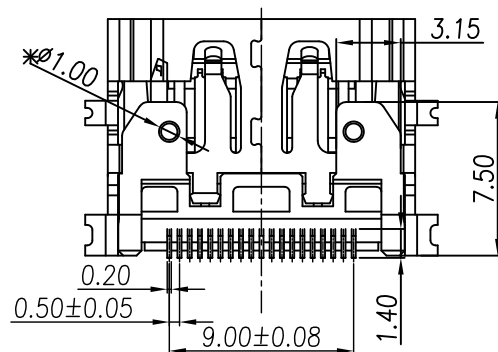
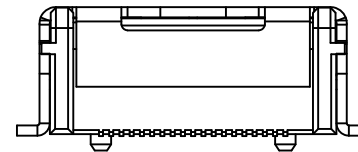
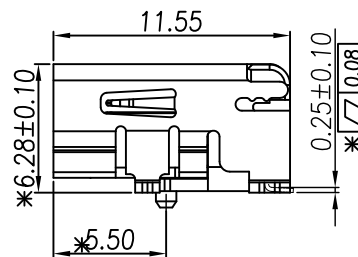
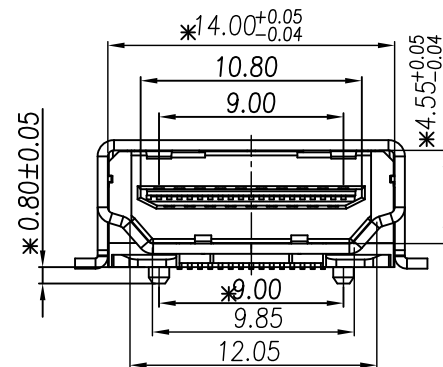
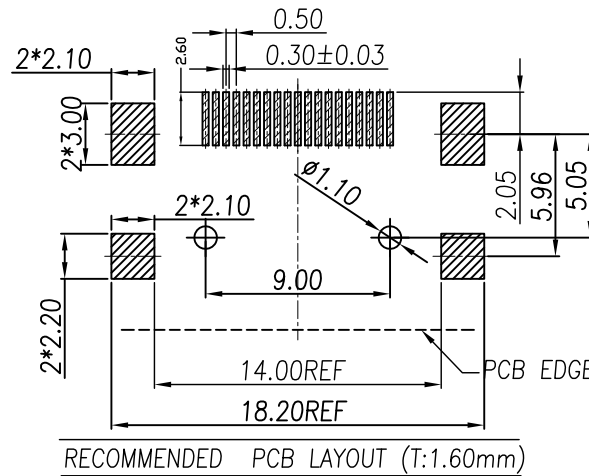


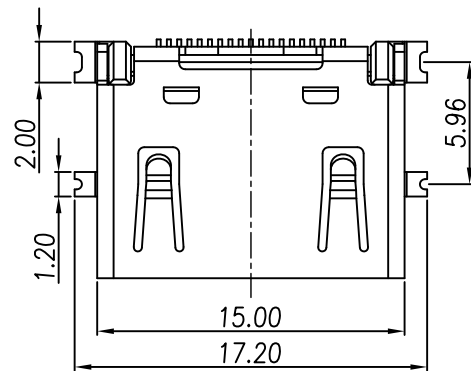

备注:

1) 材质:

1-1 本体:LCP 94V-0 黑色

1-2 端子:青铜 T=0.20mm

1-3 铜壳:青铜或SPCC T=0.50mm

2) 镀层:

2-1端子:所有面镀镍镀, 接点镀金(参照料号编码), 焊脚镀锡100u",

2-2外壳:镀金或镍

3) 技术规格

3-1. 额定电压:40V

3-2. 额定电流:0.5A

3-3. 绝缘电阻:100兆欧最小

3-4. 接触电阻:30豪欧最大

3-5. 操作温度:-20度到85度

3-6. 插入力:44.1牛最大

3-7. 拔出力:9.8牛最小, 44.1牛最大

3-8. 耐久:10000次

4) 标"*"的QC重点标制尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

HDMI-SWEE-19-LF
SERIES T T LEADFREE
19 WAY
EAR+EAR
90°SMT
FEMALE

DESCRIPTION: HDMI A TYPE 全贴片 双柱9.0