
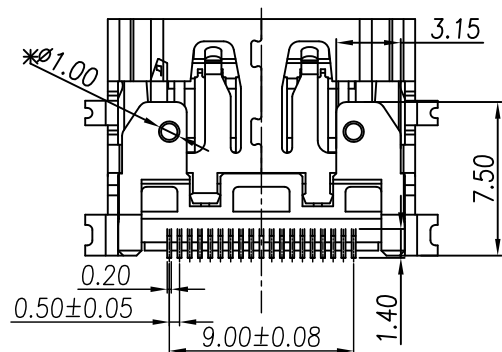
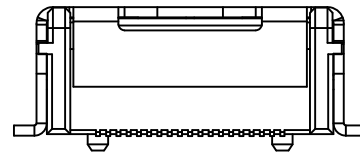
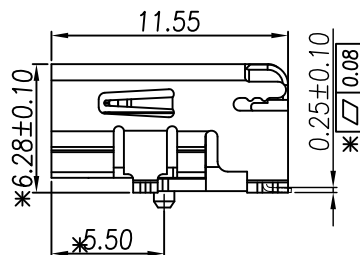
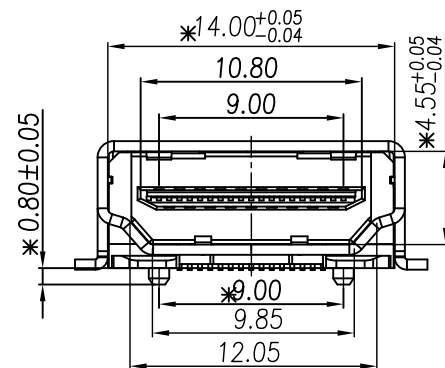
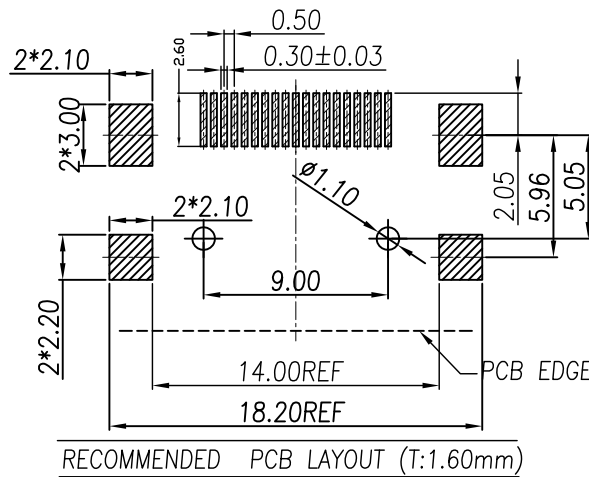


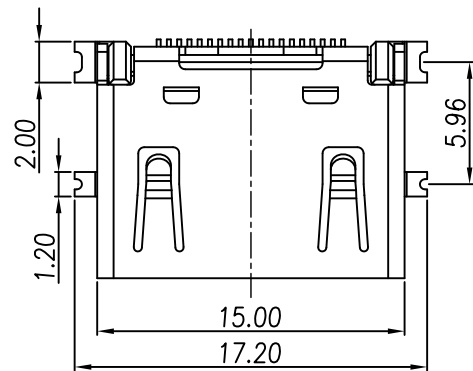

备注:

1) 材质:

1-1 本体:LCP 94V-0 黑色

1-2 端子:青铜 T=0.20mm

1-3 铜壳:青铜或SPCC T=0.50mm

2) 镀层:

2-1端子:所有面镀镍镀, 接点镀金(参照料号编码), 焊脚镀锡100u",

2-2外壳:镀金或镍

3) 技术规格

3-1. 额定电压:40V

3-2. 额定电流:0.5A

3-3. 绝缘电阻:100兆欧最小

3-4. 接触电阻:30豪欧最大

3-5. 操作温度:-20度到85度

3-6. 插入力:44.1牛最大

3-7. 拔出力:9.8牛最小, 44.1牛最大

3-8. 耐久:10000次

4) 标"*"的QC重点标制尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框


ORDER INFORMATION

HDMI-SWEER-19-LF
SERIES | | | LEADFREE
19 WAY
REEL
EAR+EAR
90°SMT
FEMALE


DESCRIPTION: HDMI A TYPE 全贴片 双柱9.0

包装方法：

1 将包装机上设置合格的载带与自粘带调试OK, 在前段16穴不放产品, 自17穴依次按图示放检验合格的产品, 直到放完500PCS后再空8穴, 裁断载带再留300mm上带后截断, 然后在尾部粘上美纹胶纸 (长约10CM), 并在卷盘表面贴上标签.

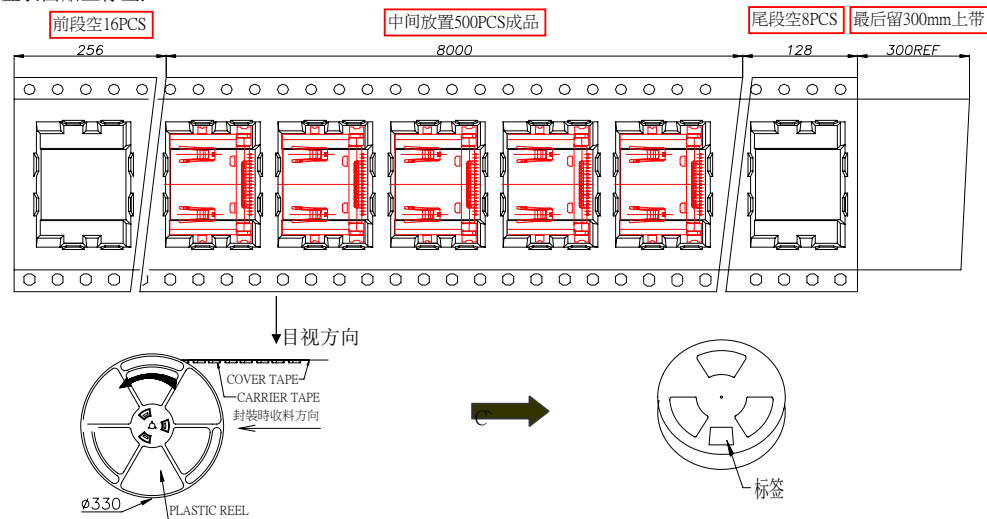

2.把8卷封 装好的产品, 标签一律朝上平放进防水袋, 用封箱胶纸将防水袋将防水袋口平巾封紧, 在外箱底部先垫一片纸板, 并在外箱四个内角各放置一个三角架, 再把用防水袋装好的8卷产品放进外箱中, 在上层盖上一片纸板, 再将其用封箱胶纸将外箱口封好, 并在外箱两侧麦右下角位置各贴上1PCS标签.(如下图所示)

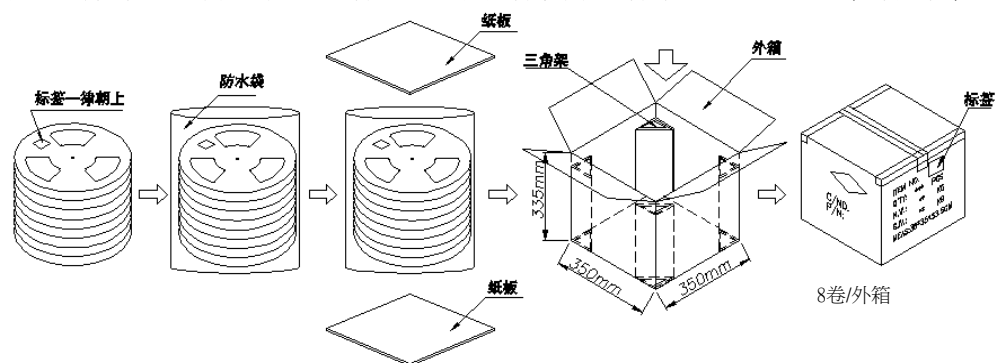

3. 注意事项

- 1对未达到整箱之尾数包装需在外箱内填满纸皮或用合适的纸皮支撑架将箱内空隙撑起.
- 2每箱须以胶带封箱及打包带束紧扎实.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

HDMI-SWEER-19-LF
SERIES
LEADFREE
19 WAY
REEL
EAR+EAR
90°SMT
FEMALE

DESCRIPTION: HDMI A TYPE 全贴片 双柱9.0