
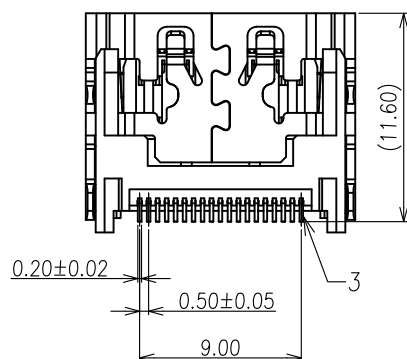
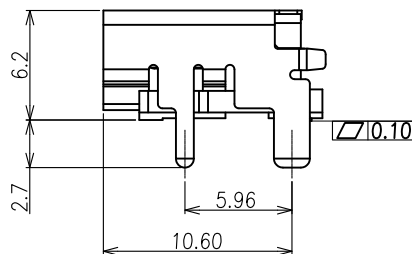
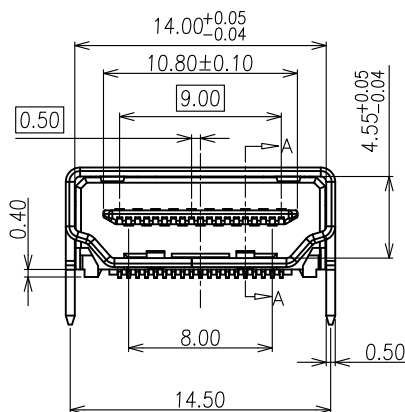
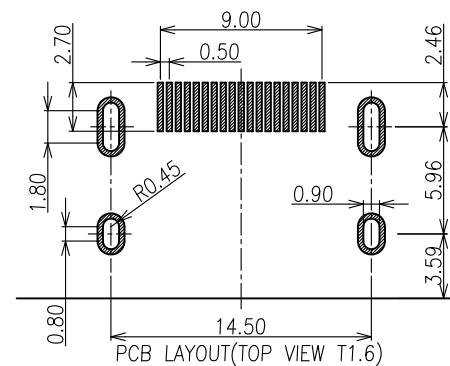
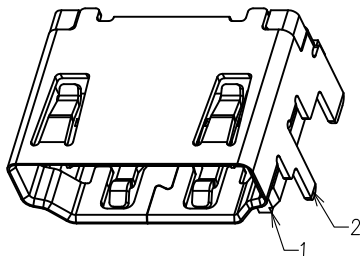


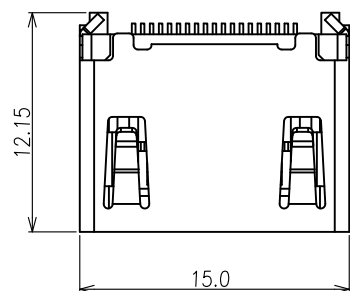

NOTES:

- 1.) MATERIAL:
 - 1-1. HOUSING: LCP, UL 94V-0, COLOR: BLACK;
 - 1-2. CONTACT: C2680 T=0.20;
 - 1-3. SHELL: C2680 T=0.50;
- 2.) FINISH:
 - 2-1. CONTACT: Au 0.6U" PLATING ON CONTACT AREA, MATTE PURE Sn 50u" Min. PLATING ON SOLDER TAILS, 30u" Min. Ni UNDERPLATING OVERALL;
 - 2-2. SHELL: PLATING Ni 30U" MIN
- 3.) SPECIFICATIONS:
 - 3-1. VOLTAGE RATING: 40V
 - 3-2. CURRENT RATING: 0.5A
 - 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
 - 3-4. CONTACT RESISTANCE: 30MILL.OHM MAX
 - 3-5. OPERATION TEMPERATURE: -20° TO +85°
 - 3-6. INSERT FORCE: 44.1N MAX
 - 3-7. EXTRACT FORCE: 9.8~44.1N
 - 3-8. DURABILITY: 5000 CYCLES

3	CONTACT	19	C2680	PLATED Au
2	SHELL	1	C2680	PLATED Ni
1	HOUSING	1	LCP	UL94V-0, Black
NO.	DESCRIPTION	Q'TY	DESCRIPTION	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38
.X ± 0.30
.XX ± 0.25
.XXX ±
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SWM-19V21-LF

SERIES | LEADFREE
HDMI 2.1
19 WAY
METAL FOOT
90°SMT
FEMALE

DESCRIPTION: HDMI 2.1 19P A/F 母SMT 12.15脚仔2.70mm HF