


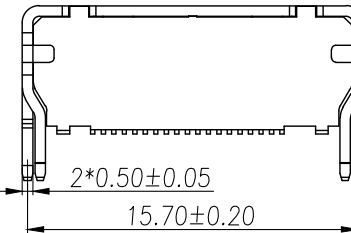
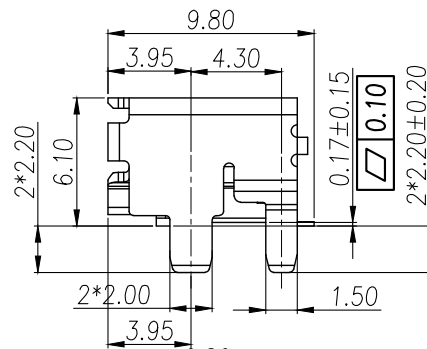
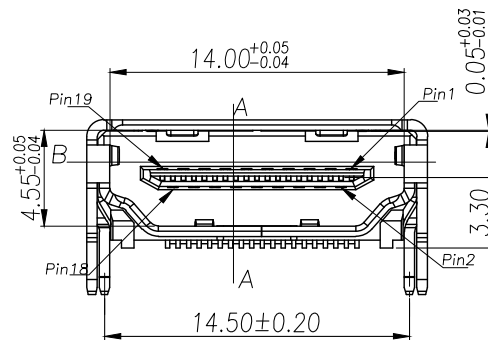
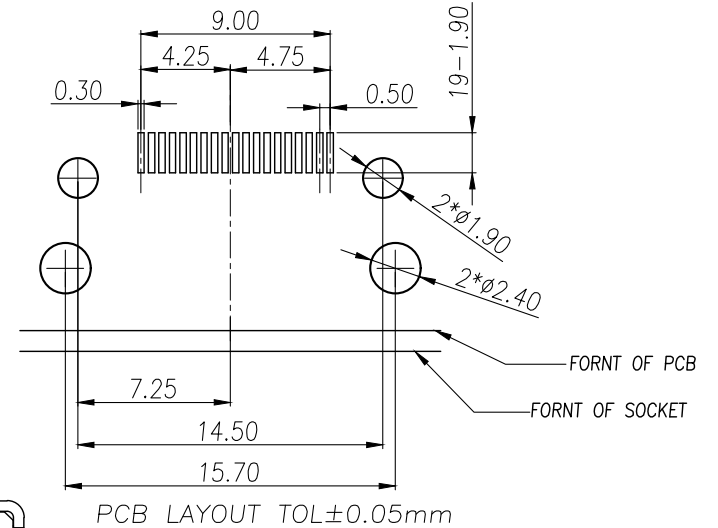



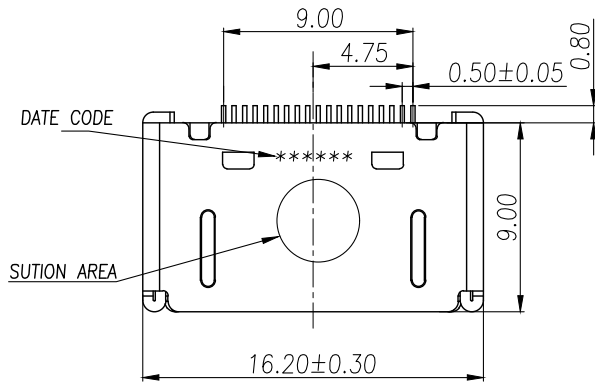

3	CONTACT	19	C2680R-H	PLATED Au/SN
2	SHELL	1	SUS304	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

NOTES:

1) MATERIAL:

- 1-1. HOUSING: LCP,UL94 V-0, COLOR: BLACK;
- 1-2. CONTACT: C2680,T=0.20±0.05mm;
- 1-3. SHELL: SUS304,T=0.50±0.05mm;

2) PLATING:

- 2-1. CONTACT: Au 3U" MIN. PLATING ON CONTACT AREA, SN 50U" MIN PLATING ON SOLDER TAILS, 50u" MIN. Ni UNDERPLATING OVERALL;
- 2-2. SHELL: PLATING Ni 50U"MIN.

3) SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 40V
- 3-2. CURRENT RATING: 0.5A
- 3-3. INSULATION RESISTANCE: 100MΩ MIN. @500V DC
MAETD PLUG 10MΩ MIN. @150V DC
- 3-4. CONTACT RESISTANCE: 30mΩ MAX.
- 3-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AV/1 MINUTE
- 3-6. OPERATION TEMPERATURE: -20°C TO +85°C
- 3-7. INSERT FORCE: 44.1N (4.5kgf) MAX.
- 3-8. EXTRACT FORCE: 9.8~39.2N (1.0kgf~4.0kgf)
- 3-9. LIFE: 10000 CYCLES MIN.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
X. ± 0.25
.XX ± 0.20
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

HDMI-SWM1543S03-19-LF

SERIES
FEMALE
LEADFREE
19WAY
SEMI GOLD 3u"
ROW FOOT 4.3mm
METAL FOOT 15.7mm
90° SMT

DESCRIPTION: HDMI A TYPE 19P母座板上SMT短体 L=9.0 2.1版

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com