

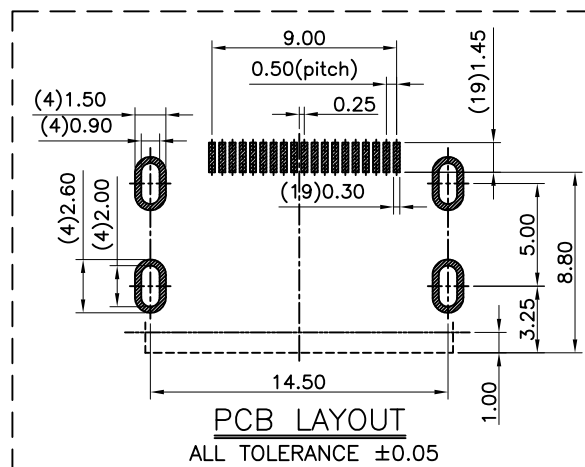
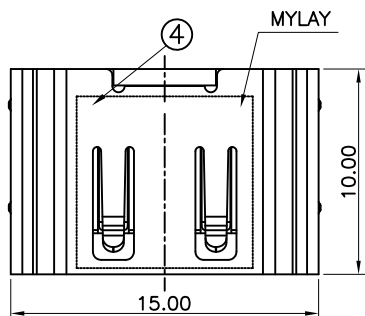
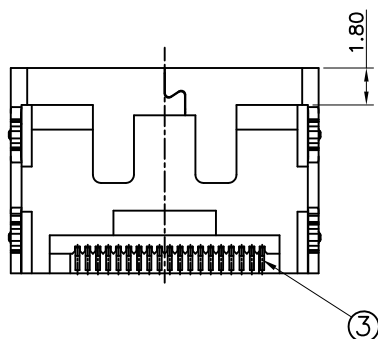




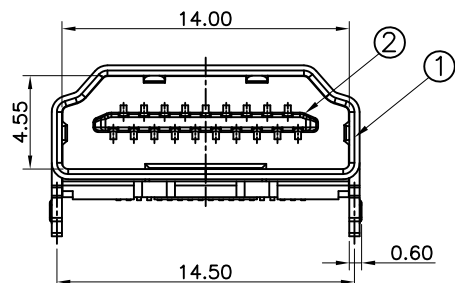

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	SHELL	1	COPPER	Ni:50u"
2	HOUSING	1	HIGH TEMP PLASTIC	BLACK
3	CONTACT	19	Phosphor Bronze	Gold:15u"; Tin:150u"; Ni:50u"
4	MYLAY	1	Higt Temp.Material	(Amber)

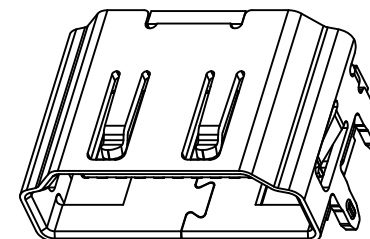

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current:0.5A

Applicable wire: AWG#26 Max.

Operating temperature: -10°C ~ +60°C

Storage temperature: -20°C ~ +85°C

ELECTRICAL

Insulator resistance: 1000 Mohms Min. @ 500 VDC

Withstanding voltage: 500 VAC/minute

Contact resistance: 40 mohms Max.

MECHANICAL

Insertion force: 44.1N(4.5Kgf) Max.

Withdrawal force: 9.8~39.2N(1.0~4.0Kgf).

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21Kgf) Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.20

.XXX, ±

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SWRVM2C-19-LF

SERIES LEADFREE

19 WAY

MYLAR

METAL FOOT

90°SMT REVERSED

DESCRIPTION: HDMI connector