




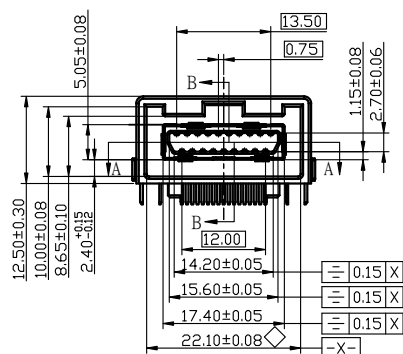





SECTION A-A

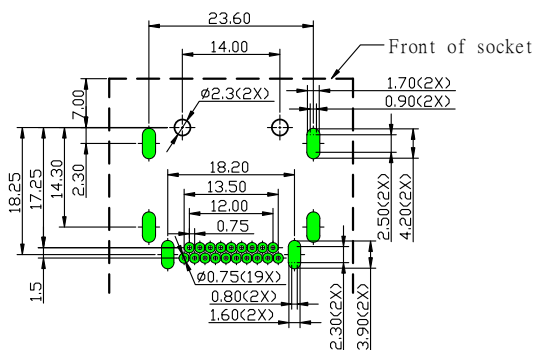

SECTION B-B

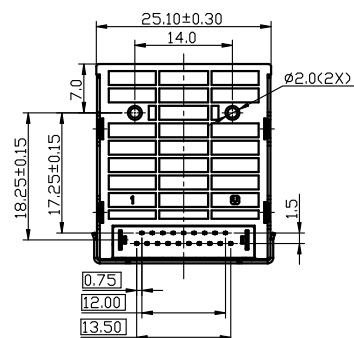

Recommend PCB Layout Tolerance : ± 0.05 mm
PCB Thickness : T=1.6 mm

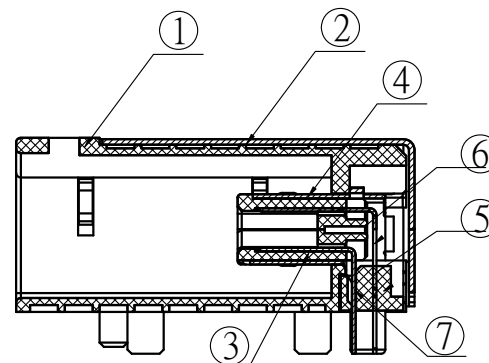


View2:1

Notes:

- 1.Electrical Characteristics:
Voltage rating: 40VAC,Current rating:0.5A min.
Withstanding voltage:500VAC
Insulation Resistance:100M Ω min.
Contact Resistance:30m Ω max.
- 2.Mechanical:
Insertion Force: 70N max.Withstanding Force: 100N min.
- 3.Material:
Outside Housing:PA6T HTNFR52G30NH, Black,UL94-V0
Inside Housing:LCP, Black,UL94-V0
Cover :LCP, Black,UL94-V0
Shell :Stainless steel T=0.4mm
Inside Shell :Stainless steel,T=0.3mm
Contact 10P:Copperalloy,T=0.25mm
Contact 9P:Copperalloy,T=0.25mm
- 4.Plating :
Contact : Ni 50u" Min under plated,Au 10u" plated on contact area and Sn 100u" Min plated on solder area
Shell&Inside Shell : Ni 30u"Min overall plating
- 5.Assembled product terminal and shell DIP soldering feet do not deformation

⑦	Contact 9P	SET	1
⑥	Contact 10P	SET	1
⑤	Cover	PC	1
④	inside shell	PC	1
③	inside housing	PC	1
②	shell	PC	1
①	Outside Housing	PC	1
ITEM	DESCRIPTION	UNIT	Q'TY

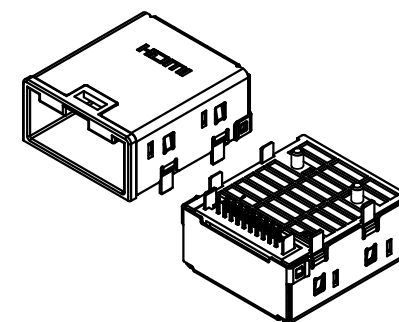

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.15
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$ 2°

照片框

ORDER INFORMATION

HDMI15-SRX-19-LF

SERIES

LEADFREE

19WAY

NON NUT

DIP 90°

FEMALE


DESCRIPTION: HDMI E TYPE 19P RECEPTACLE/DIP

◇ Key Characteristic

5x6=30pcs/盤
5x6=30pcs/plate




第二層在第一層的基礎上旋轉180°
The second layer is rotating 180°
basic on the first layer.
第三,四層.....以此類推
The third,the fourth....is the same.

10盤/扎,每扎裝產品300PCS;裝好產品后在產品的頂層(即第10層)
蓋上一個空的真空盤.10plates/sheaf,each sheaf has 300pcs products
,put on emty plate on the top(tenth layer)when the packing is ok.
并用PE膜進行纏繞,然后放入4個乾燥劑,最外面套一個膠袋
and use PE film to wrap,then putin 4 dirsccants and add a plastic bag.

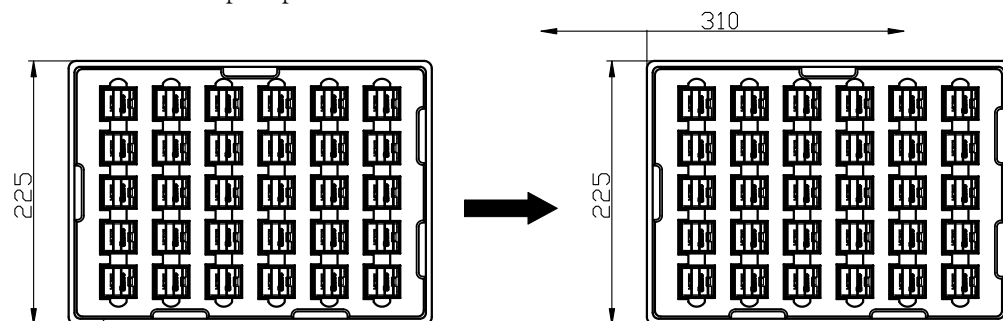

⑧

平放2扎,豎放1扎,共放3扎/箱
Flatwise 2 sheaf,upright 1sheaf,total 3 sheaf a box.
紙箱空餘的地方用紙條填充
The spare place of the box is full by the paper.

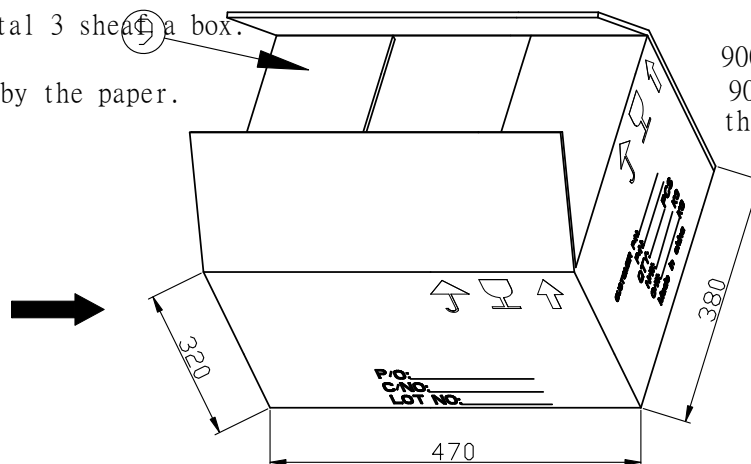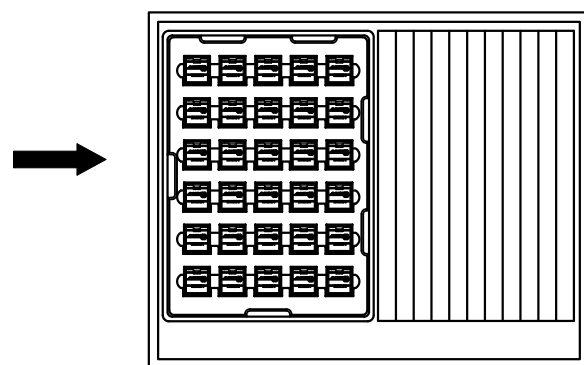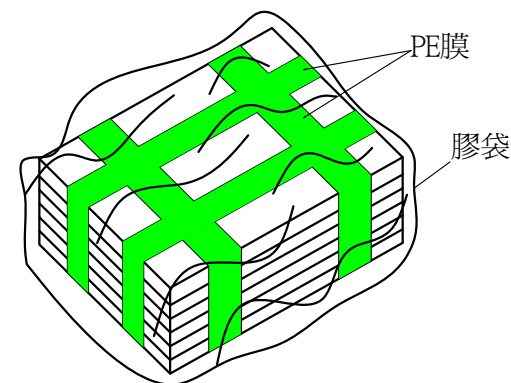

900pcs/箱,外箱填寫上單號,數量,淨重,毛重
900pcs/Box,the outside of the box need to write
the number,quality,net weight,cross weight.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDMI15-SRX-19-LF

SERIES

LEADFREE
19WAY
NON NUT
DIP 90°
FEMALE

DESCRIPTION: HDMI E TYPE 19P RECEPTACLE/DIP