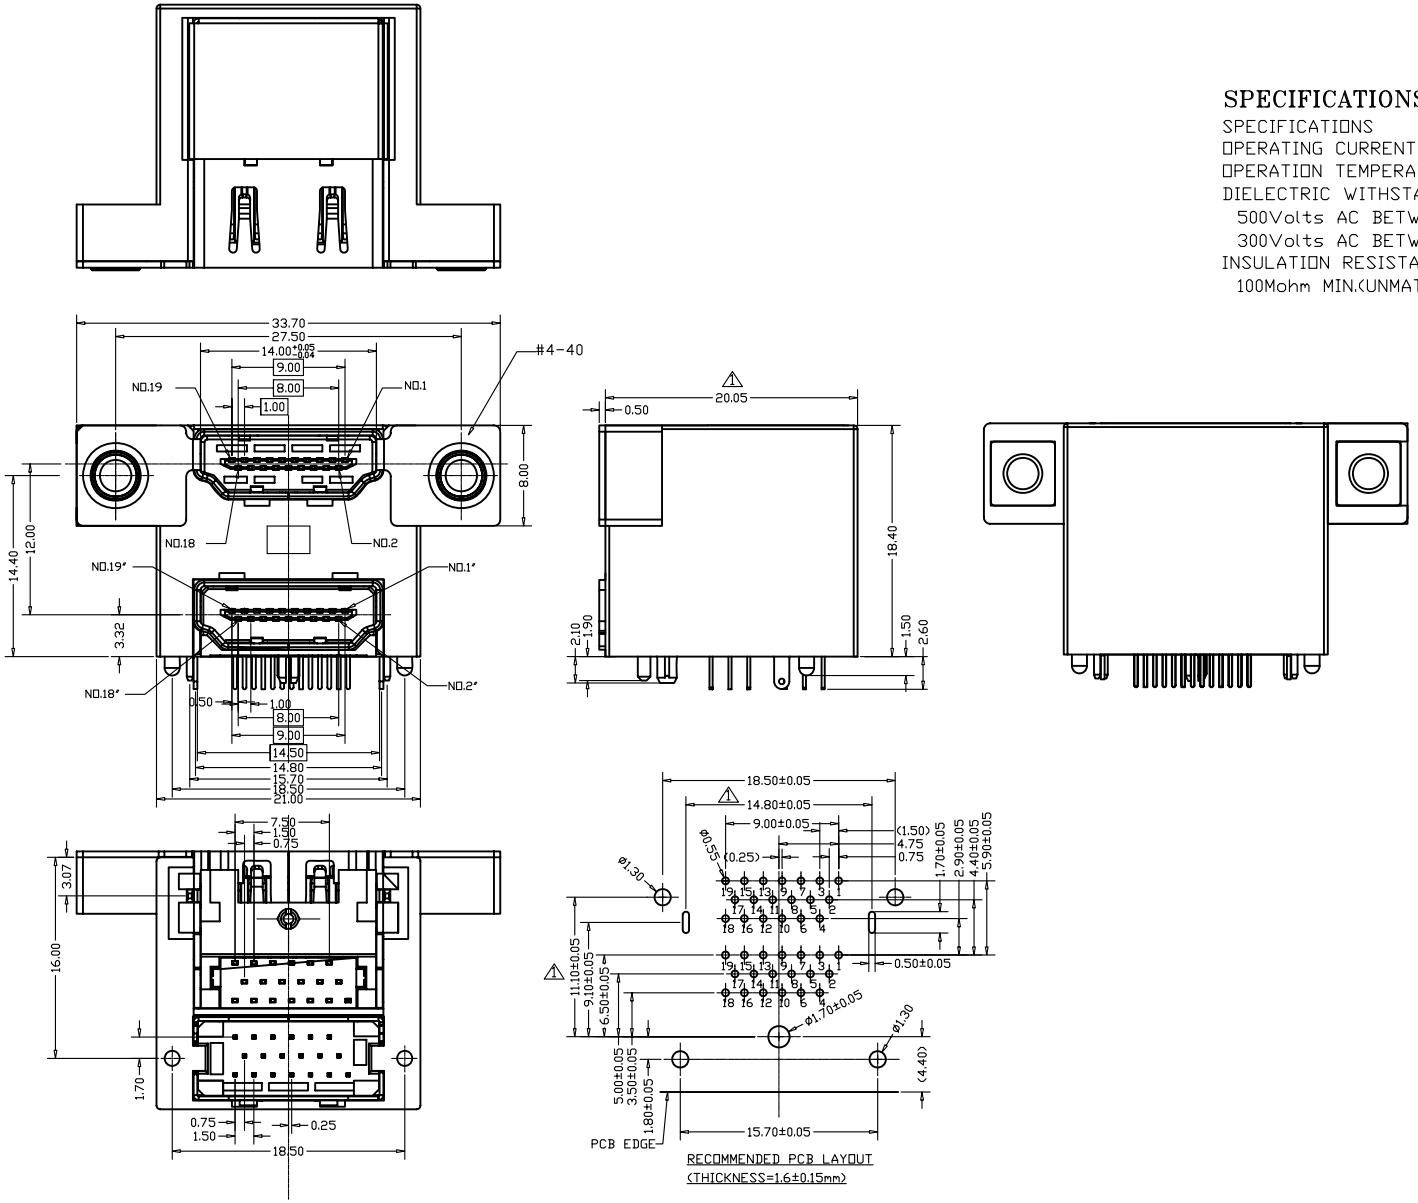

SPECIFICATIONS

SPECIFICATIONS
OPERATING CURRENT: 0.5A MAX.
OPERATION TEMPERATURE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

HDMIB1-FRE-19-LF

- SERIES
- FEMALE
- DIP 90°
- EAR
- 19 WAY
- LEADFREE

DESCRIPTION: DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE