

接点方式:


1. 线材:UL20276 1.3v非标 30AWG 黑色外被 OD:5.5mm L=200mm
2. 插头:HDMI19公头, 壳镀金
3. 插头:HDMI19母头, 壳镀金
4. 内模: PE内模料
5. 外模: 45P黑色 PVC外模料

测试条件:

1. 100% 短路, 断路, 错位, 绝缘测试;
2. 耐压绝缘测试条件: DC300V/5MΩ /0.01S
3. 导通阻值: 小于10Ω

包装方式:

普通环保PE袋热封, 1PCS入一袋

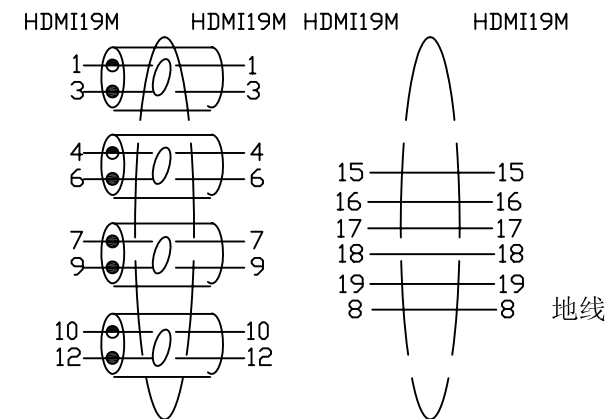

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

.XXX ±

ANG ±

DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

HDMIX2-191930PE-Exxx-LF

SERIES

LEADFREE

15C:150mm

20C:200mm

19 TO 19 WAY

30 AWG

MALE TO FEMALE
PANEL

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: