



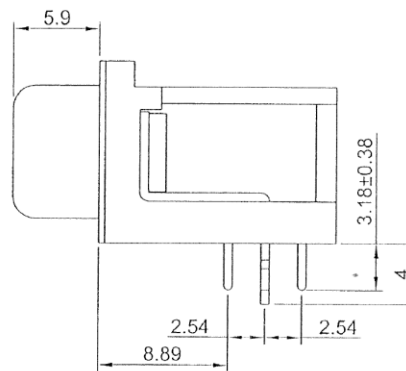

RIVETED INSERT : BRASS, NICKEL PLATED.

OPERATING TEMPERATURE : -55°C ~ +105°C.

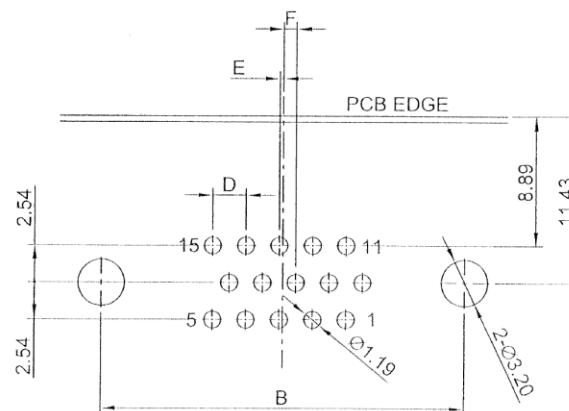

POSITION	A±0.20	B±0.20	C±0.38	D	E	F
15 PIN	16.90	25.00	30.80	2.29	0.25	0.89
26 PIN	25.25	33.30	39.20	2.29	0.51	0.64
44 PIN	38.95	47.05	53.05	2.29	0.51	0.64
62 PIN	55.40	63.50	69.40	2.41	0.58	0.62

照片框

DESCRIPTION: HIGH DENSITY D-SUB RIGHT ANGLE MALE FOOTPRINT:8.89mm