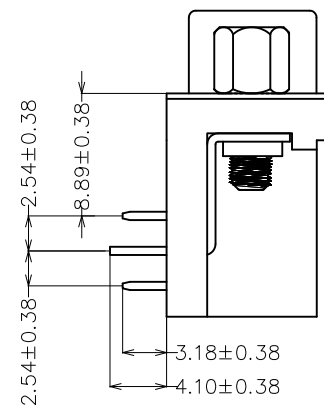
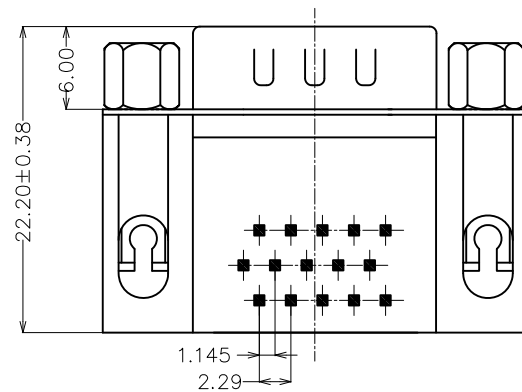
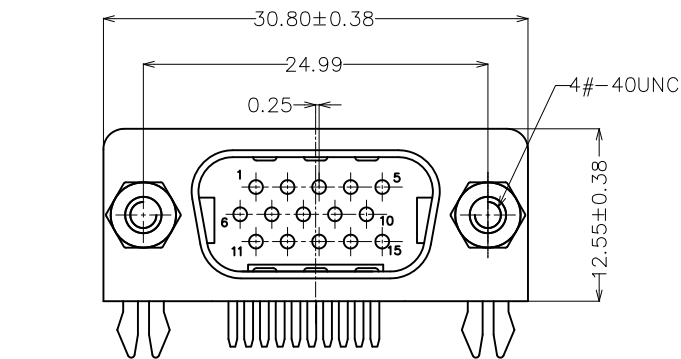


P.C.B. LAYOUT(TOLERANCE±0.05)
TOP VIEW


OTES:

.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber(UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact: Gold Plated
- 1.4 Shell:Steel Nickel Plated
- 1.5 Screw: Brass ,Nickel Plated

.SPECIFICATION

- 2.1 Current Rate:3 Amps
- 2.2 Insulator Resistance:1000MΩMin.
- 2.3 Dielectric Strength:500V AC Per minute
- 2.4 Operation Temperature:-40℃ to+85℃
- 2.5 Contact Resistance:30mΩ Max

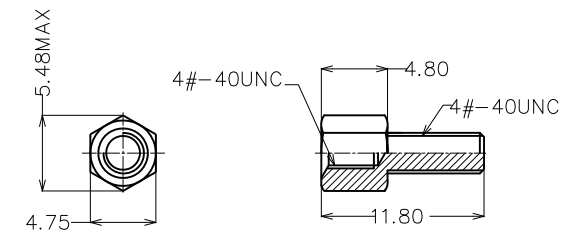

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.20
ANG ± 2°

PPOJECTION

ORDER INFORMATION

HDR-PGNJ-15-LF
SERIES
LEADFREE
15 WAY
JACKSCRW
NUT
FULL GOLD
MALE

DESCRIPTION: HDR 15公8.89鉚附全金黑 3.18

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com