
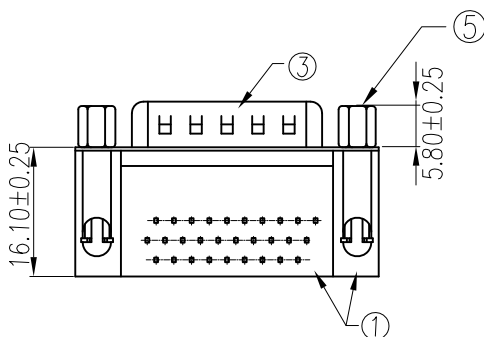
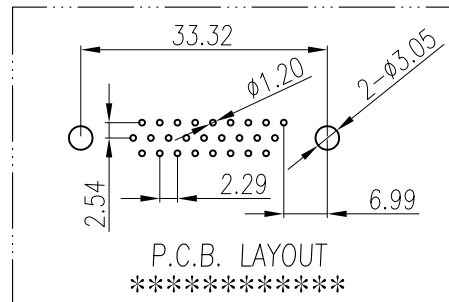
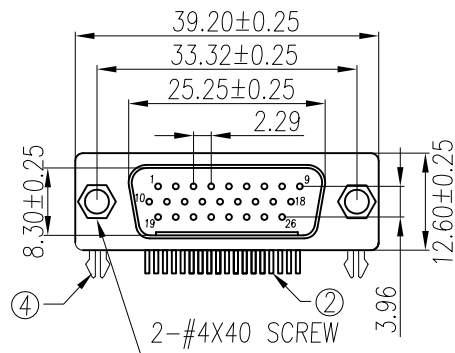


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

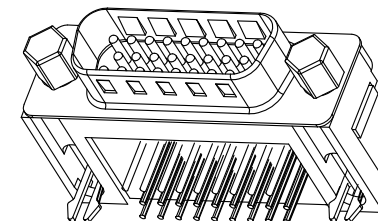

| 6   | Rivited             | 2    | Brass             | 5.4*5.1mm           | 80u"min Nickel Plated                                                                                                       |
|-----|---------------------|------|-------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------|
| 5   | Screw               | 2    | Brass             | 4.75*11.80mm        | 80u"min Nickel/Tin Plated                                                                                                   |
| 4   | "Z" type board-lock | 2    | Brass             | T=0.50mm            | 80u"min Tin Plated                                                                                                          |
| 3   | Front-shell         | 1    | Cold rolled steel | T=0.40mm            | Cu:40u"min. 80u"min Nickel Plated                                                                                           |
| 2   | Contact             | 26   | Brass             | T=0.20mm            | Contact area:0.8u"min Gold Plated over 40u"Nickel min.<br>Solder area:80u"min Tin Plated over 40u"Nickel min.<br>(All Gold) |
| 1   | Housing             | 2    | P.B.T             | UL 94-V0            | Black                                                                                                                       |
| No. | Name                | Q'ty | Material          | Remarks & Thickness | Finish                                                                                                                      |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

HDR-PGNJ6-26-LF

SERIES T LEADFREE  
26 WAY  
MALE JACKSCRW 5.8+6mm  
NUT FULL GOLG

DESCRIPTION: HDD RIGHT ANGLE P.C.B TYPE 26PIN(M) 鉚鎖NUT