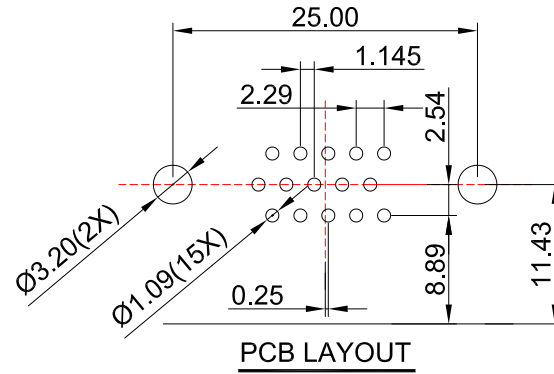
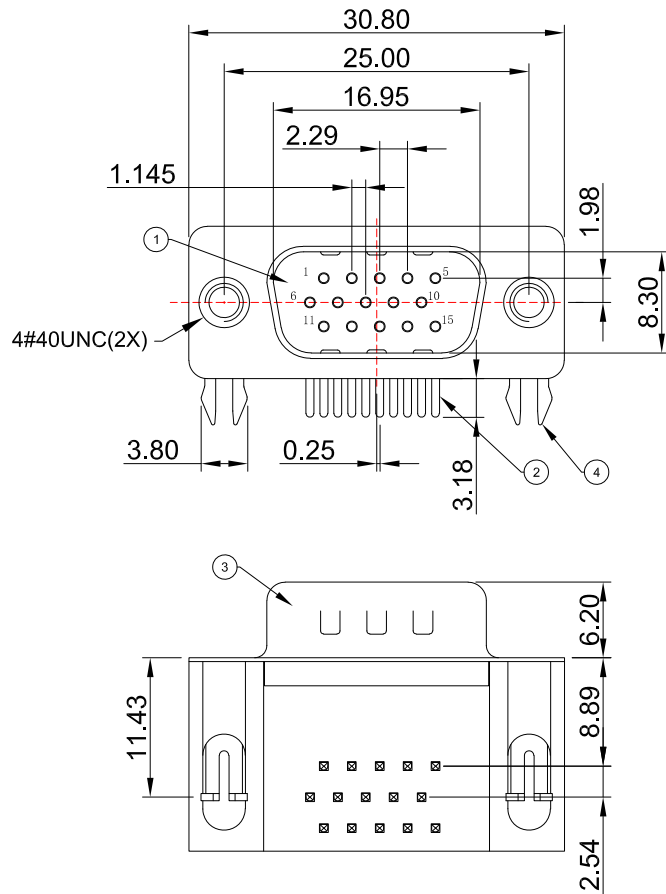


Note:

1. Rating : 3A Max. , 250V AC Max.
2. Contact Resistance : 30mΩ Max.
3. Insulator Resistance : 3000MΩ Min.
4. Withstanding Voltage : 500V AC for 1 Minute.
5. Operating Temperature :-45°C~+85°C

4	Board lock	SPCC , Tin Plated	2
3	Shell	SPCC Alloy, Nickel-plated	1
2	Contact	Copper Alloy, G/F Plated in contact area, Tin plated in solder area	15
1	Housing	PBT ,Blue	1
No.	Part Name	Specifications	Qt'y

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDR-PSNBL-15-LF
SERIES | | | LEADFREE
BLUE
NUT
SEMI GOLD
MALE

DESCRIPTION: D-SUB 15P(M),R/A,DIP