
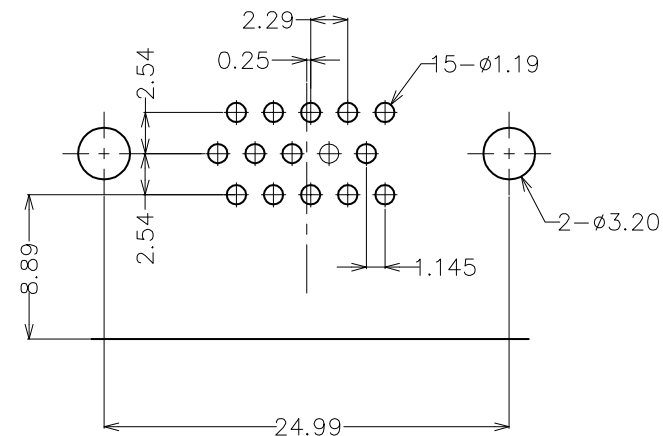


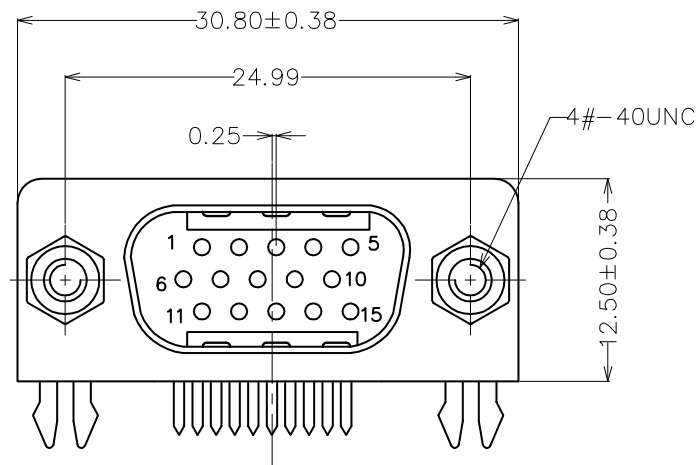

P.C.B. LAYOUT (TOLERANCE ± 0.05)
TOP VIEW

NOTES:



1. MATERIAL

- 1.1 Insulator: PBT+30%Glass Fiber(UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact: Gold/Tin Plated
- 1.4 Shell: Steel Nickel Plated
- 1.5 Screw: Brass ,Nickel Plated

2. SPECIFICATION

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: $1000M\Omega$ Min.
- 2.3 Dielectric Strength: 500V AC Per minute
- 2.4 Operation Temperature: $-55^{\circ}C$ to $+105^{\circ}C$
- 2.5 Contact Resistance: $30m\Omega$ Max

"*"標示是重點管控尺寸

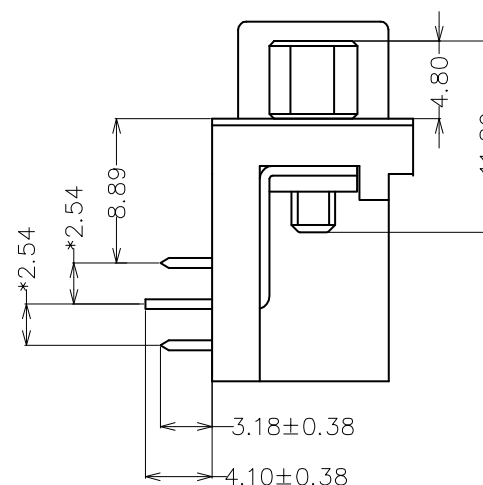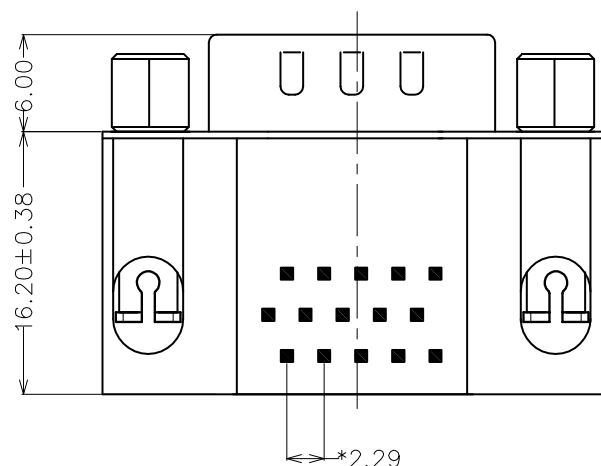

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ± 0.38
X, ± 0.25
.XX, ± 0.15
.XXX, $\pm$
ANG $\pm 2^{\circ}$

照片框

ORDER INFORMATION

HDR-PxNJ-15-LF
SERIES | LEADFREE
15WAY
NUT+JACKSCREW
G: FULL GOLD
S: SEMI GOLD
MALE

DESCRIPTION: HDR15P 三排 8.89 公叉 鉚鎖 Black