

P.C.B. LAYOUT


NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold Plated
- 1.4 Shell:Steel,Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000MΩ Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55°C to+105°C

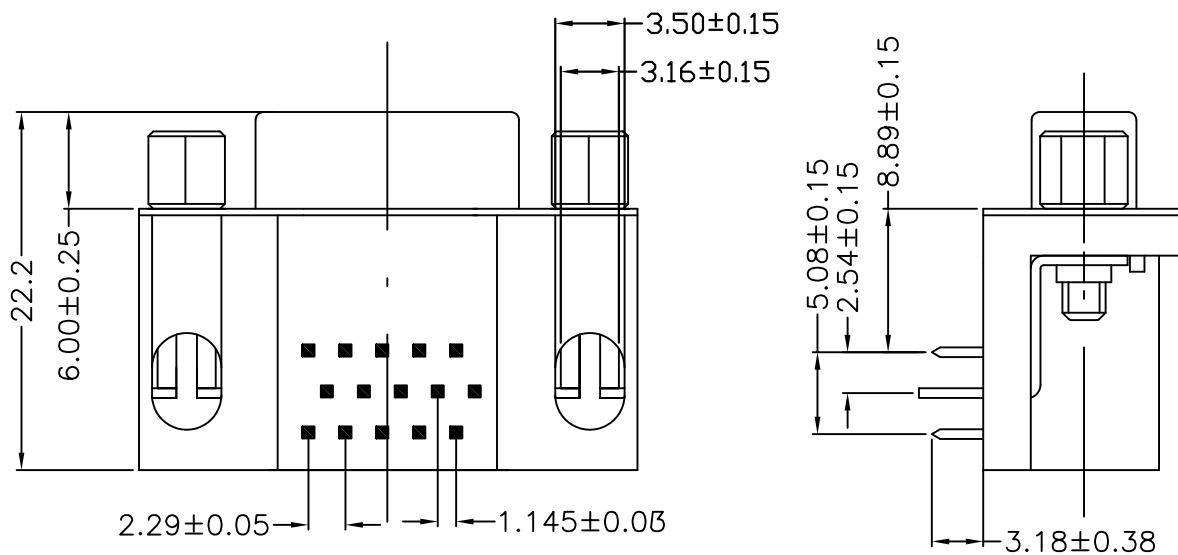

HDR-SG-15-LF
LEADFREE
RoHS Compliant



PART NO. HDR-SG-15

DWG NO. HDR-SG-15

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

15P三排8.89母叉鎖(不縮9)無毒

AREA

REVISIONS

HK

DATE

焯倫股份有限公司