


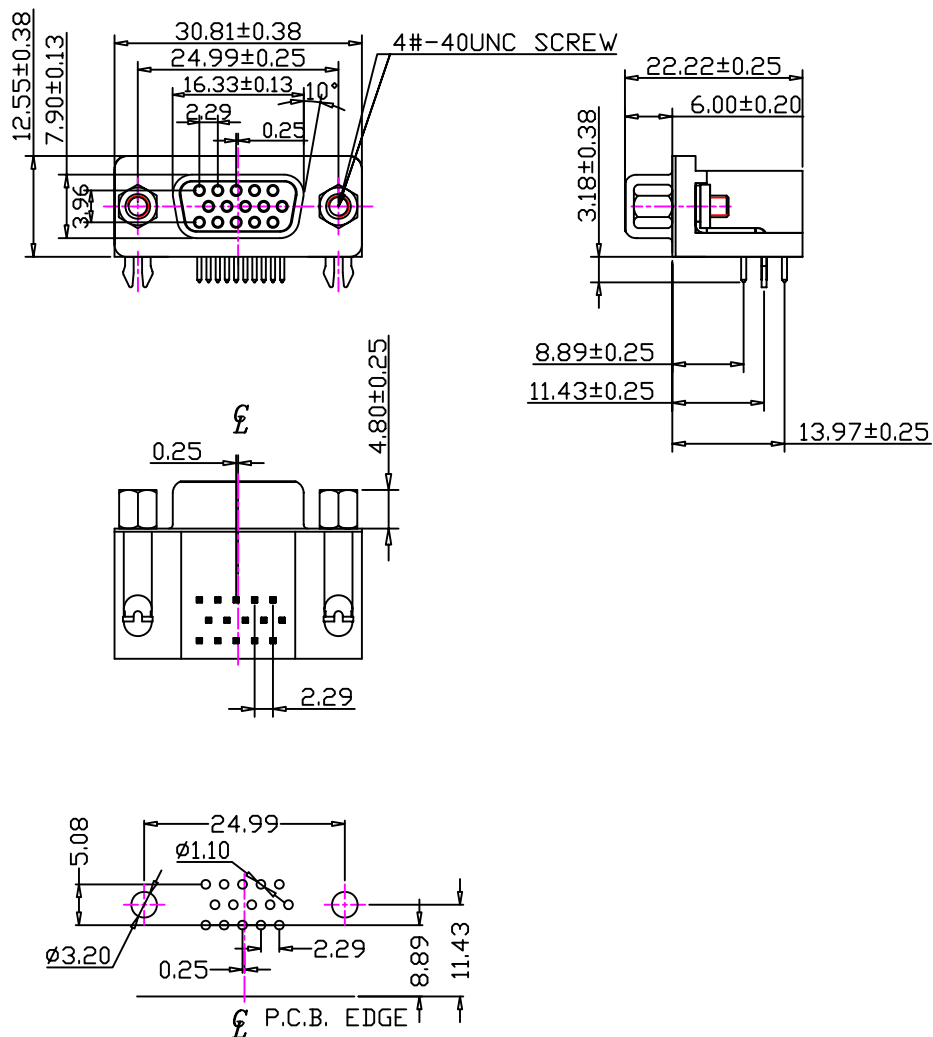

RECOMMENDED P.C.B.
LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance: 5000 Megohms Minimum at DC 500V.
Contact Resistance: 25 Milliohms Maximum.
Operating Temperature: -55°C to $+105^{\circ}\text{C}$.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g. Maximum.
Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.
Insulator: PBT UL 94V-0 Rated.
Shell: Cold Rolled Steel.

FINISHES:

Contact: Gold Flash.
Shell: Nickel Plated.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HDR-SS30NJ-15-LF
SERIES | LEADFREE
15 WAY
JACKSCRW
NUT
SEMI GOLD 30u"
FEMALE

DESCRIPTION: HIGH DENSITY D-SUB CONNECTOR 0.35"(8.89mm) FOOTPRINT, RIGHT ANGLE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION