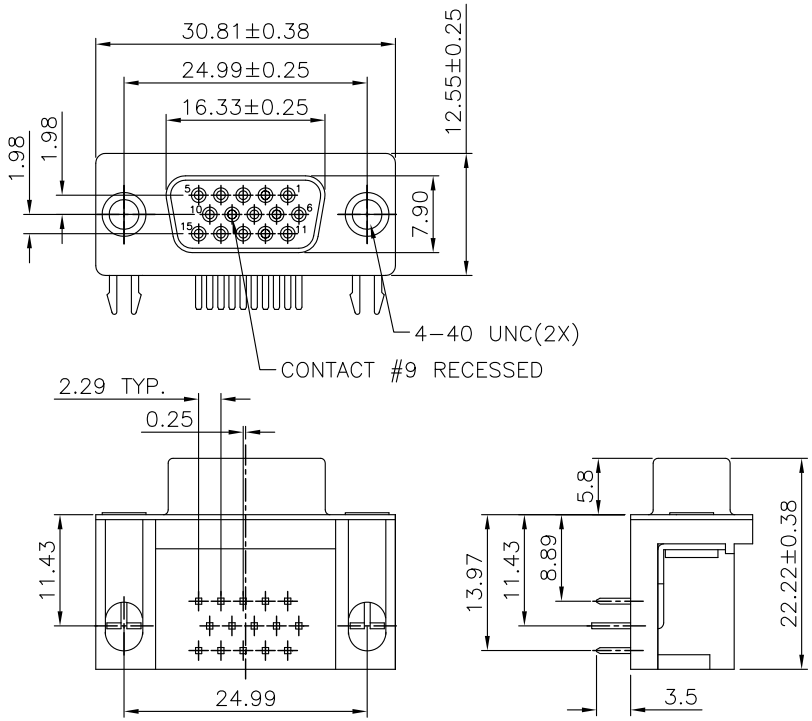

NOTES:
1.MATERIAL:
HOUSING:HIGH TEMP THERMOPLASTIC,UL94V-0,COLOR:SEE TABLE
TERMINAL:PHOSPHOR BRONZE
METAL SHELL:SPCC
BOARD LOCK:BRASS
NUT:BRASS
2.PLATING
TERMINAL:
CONTACT AREA:GOLD PLATED.
SOLDER TAIL:TIN(Sn),THICKNESS=100 MICROINCH MIN.(2.54 MICROMETER MIN.)
UNDER PLATE:NICKEL(Ni).THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
METAL SHELL:
NICKEL(Ni),THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)
UNDER PLATE:COPPER(Cu).THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
BOARD LOCK:TIN(Sn),THICKNESS=100 MICROINCH MIN.(2.54 MICROMETER MIN.)
NUT:NICKEL(Ni).THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
F 3.SCREW MEETS TORQUE WITHSTANDED 2.5 kgf-cm MIN.
4.RECOMMENDED PCB THICKNESS:1.6±0.05mm
5.SOCKET #9 IS MOVED BACK 1.27mm FOR DDC COMPATIBILITY.

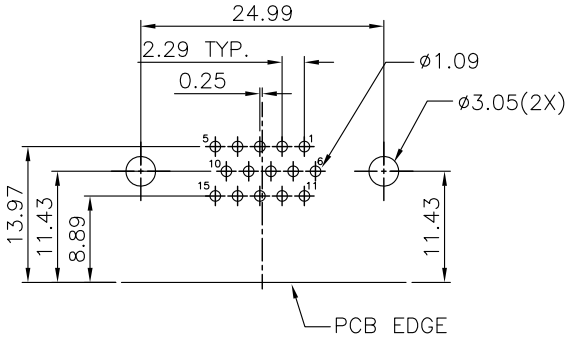

RECOMMEND P.C.BOARD LAYOUT
PCB TOLERANCE:±0.05

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG ± 3°
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

HDR-SSNBL-15S9-LF

SERIES
FEMALE
NUT
SEMI GOLD
BLUE
15WAY
SHORT PIN #9
LEADFREE

DESCRIPTION: D-SUBMINIATURE, RIGHT ANGLE .350 FOOTPRINT, HIGH DENSITY FEMALE