



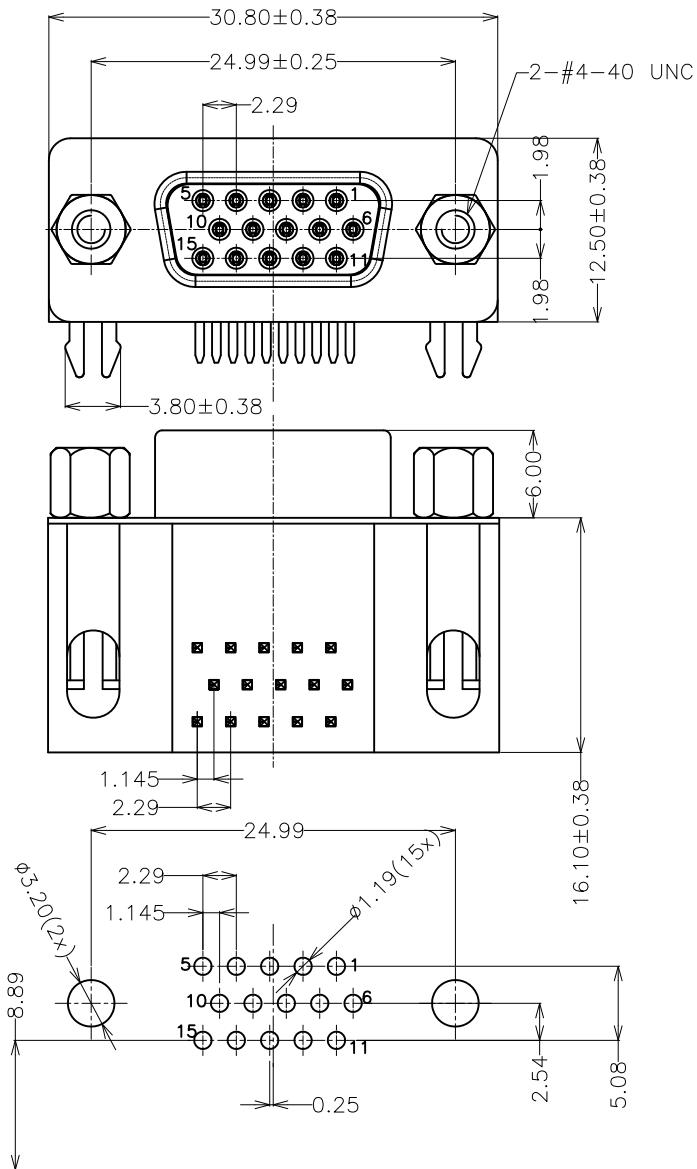

P.C.B. LAYOUT TOP VIEW

Color description

PART NO.	COLOR
HDR-SSNJBL-15	BLUE

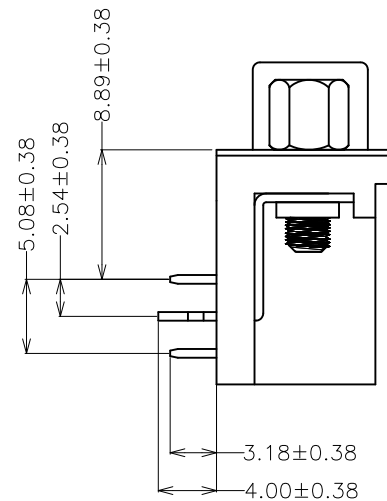


NOTES:

1.MATERIAL:

- 1.1 Insulator:PBT+30%Glass Fiber
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold Flash/Tin Plated
- 1.4 Shell: Steel, Nickle Plated
- 1.5 SCREW: BRASS, Nickle Plated

2.SPECIFICATION:

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 1000MΩ Min. At 500V DC
- 2.3 Dielectric Strength: 500V Per minute
- 2.4 Operation Temperature: -40°C to+85°C

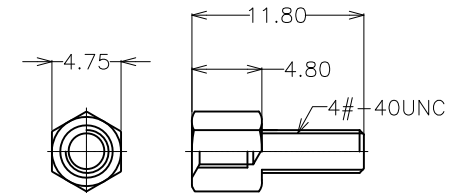

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HDR-SSNJBL-15-LF
 SERIES | | | | LEADFREE
 FEMALE | | | | 15WAY
 | | | | BLUE
 | | | | JACK SCREW
 | | | | NUT
 | | | | SEMI GOLD

DESCRIPTION: HDR 15母 8.89 半金

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 2°