
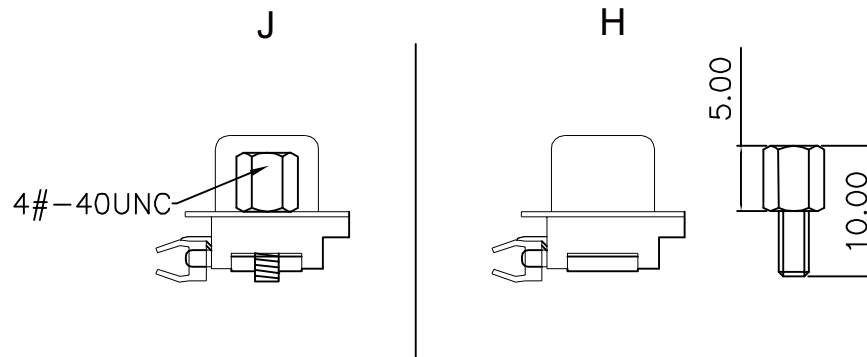

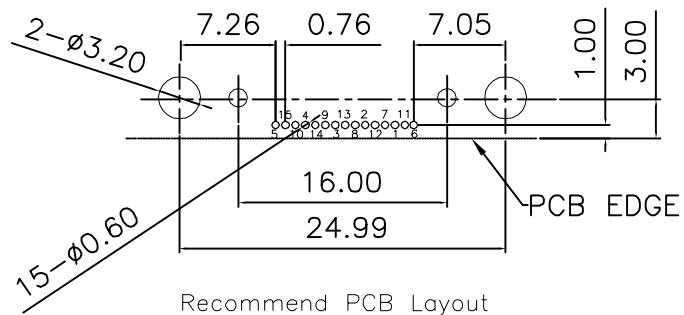


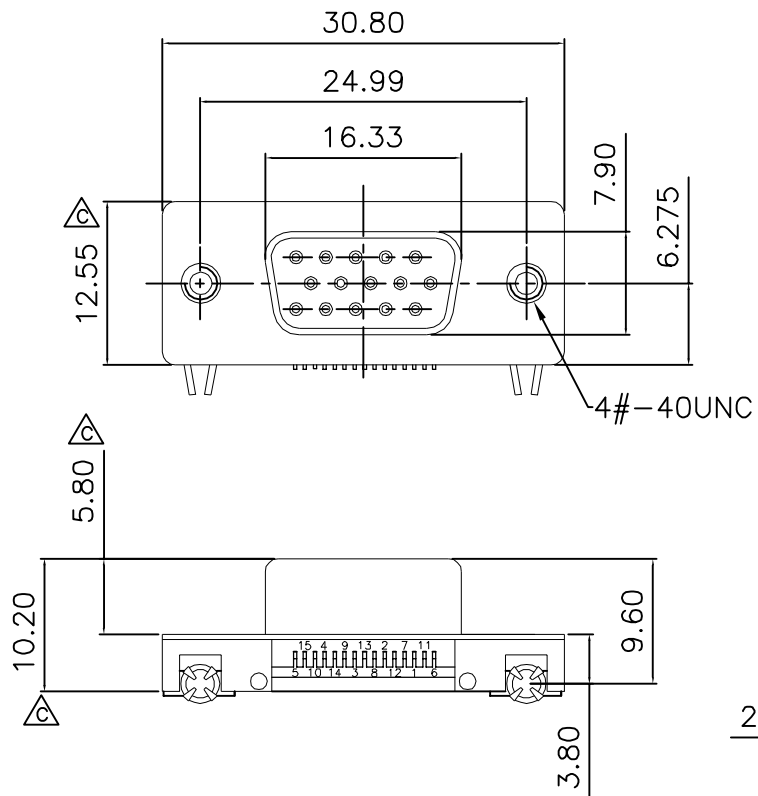

Specification:

Contact Current Rating: 1 Amperes.
Dielectric Withstanding Voltage: AC 500V at sea level.
Insulation Resistance: 1000 Megohms Min.
Contact Resistance: 30Milliohms Max.
Operation Temperature : -55°C to +105°C.

Material:

Contact: Copper Alloy.
Insulator: PA9T
Shell: SPCC.
Z-Piece: Copper Alloy.

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 2°

ORDER INFORMATION

HDR10-SNZ4x-15-LF

SERIES

LEADFREE

15 WAY

H: HEX SCREW

J: JACKSCREW

FEMALE

CLIP

NUT

DESCRIPTION: D-SUB (H-D) SLIM 90°-DIP

煜倫股份有限公司

www.morethanall.com