



MATERIALS


Contact :Phosphor Bronze,
 Nickel-Undercoated, Selective Gold-Plated
 Insulator :Nylon 9T, Black
 Shell :Steel,Copper-Undercoated, Nickel
 Or Tin plated

CHARACTERISTICS

Current Rating :3 Amps
 Insulation Resistance :5000MΩ Min.at DC 500V
 Contact Resistance :20mΩ Max. at DC 100mA
 Temperature Range :-65°C ~ +125°C
 Max Processing Temperature:285°C~290°C

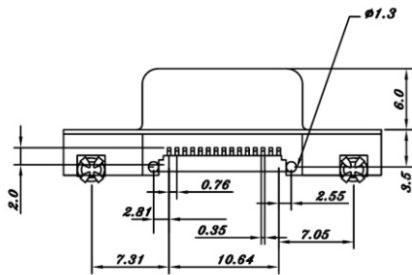

P.C.B. LAYOUT

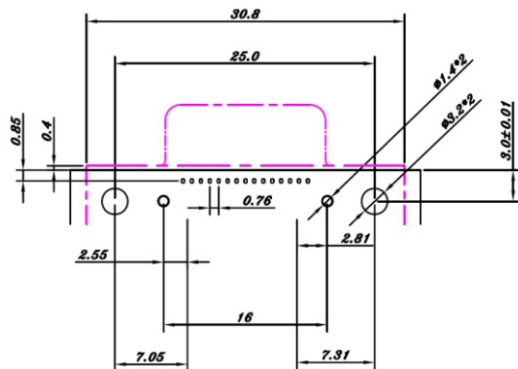

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

HDR11-SNZ4-15-LF
 SERIES | CLIP | LEADFREE
 | NUT | 15WAY
 | FEMALE

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: