

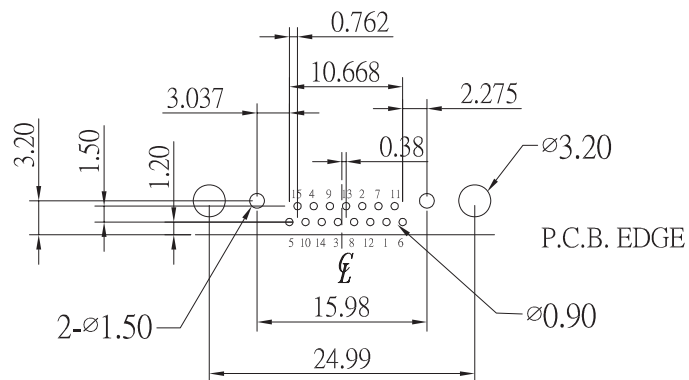
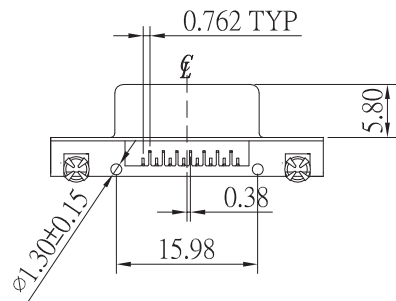



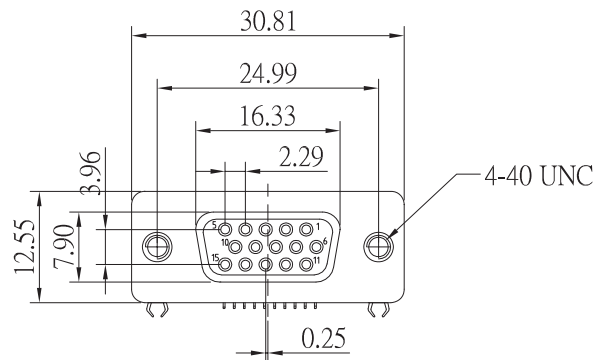

RECOMMENDED P.C.B. LAYOUT

MATERIAL
HOUSING : PBT (UL94V-0) RATED
CONTACTS : BRONZE.
PLATING : SELECTIVE GOLD PLATED.

SPECIFICATION
CURRENT RATING : 1AMP.
INSULATOR RESISTANCE 5000M Ω MIN. AT DC 500V.
CONTACT RESISTANCE : 20M Ω MAX. AT DC 100mA.
OPERATING TEMPERATURE : -65°C~+125°C.
MAX PROCESSING TEMPERATURE: 220°C FOR 3-6 SECONDS.



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.50
ANG $\pm$ 3°

照片框

ORDER INFORMATION

HDR15-SNZ4H-15-LF

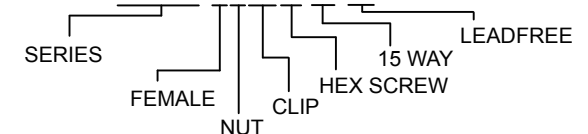

DESCRIPTION: D-SUB SLIM DIP TYPE (1.20mm) HD15 F Dual Level=1.50mm(8/7 Pin)