

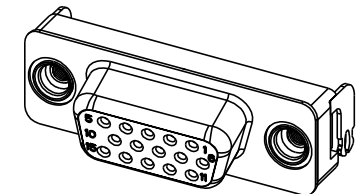




RECOMMENDED P.C.B. LAYOUT

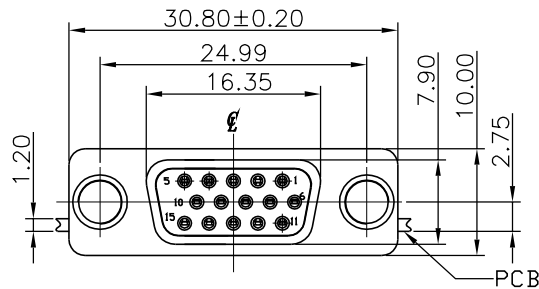

NOTE
 MATERIAL
 BODY&LATCH: LCP
 CONTACTS: BRASS
 SHELL:SPCD
 CONTACT PLATING: GOLD PLATING OVER NICKEL
 ELECTRICAL SPECIFICATION
 CURRENT RATING: 1A;
 CONTACT RESISTANCE: 20m MAX.
 INSULATION RESISTANCE:1000M MIN,AT DC 500V.
 DIELECTRIC WITHSTANDING VOLTAGE:AC 1000/60sec.R.M.S.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

HDR151-SN-15-LF

SERIES

LEADFREE

15WAY

NUT

FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: HDR SLIM 15F 薄型頭部正向排距 1.50mm(前10後5) "T.H" MARK