
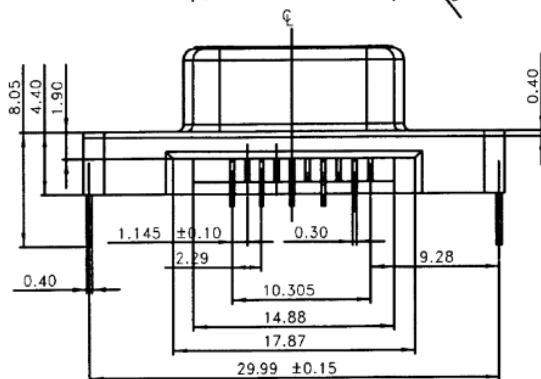

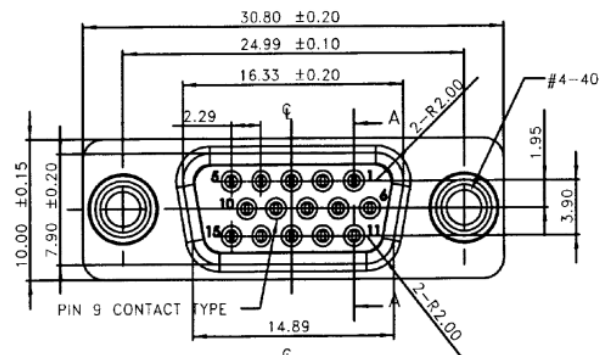


A-A SECTION

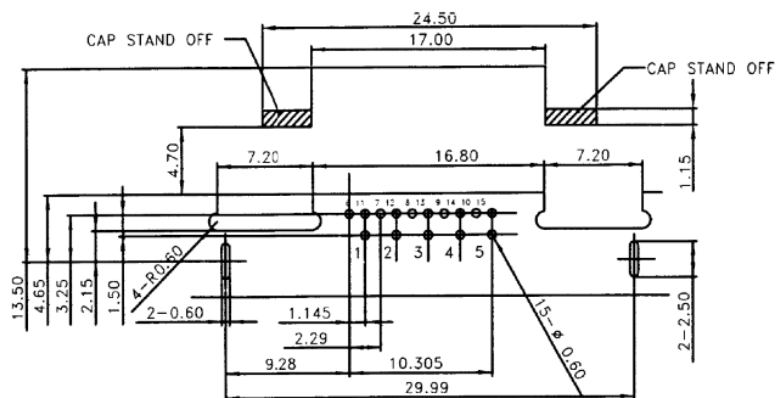

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
THICKNESS: 1.2mm GENERAL TOLERANCE: ± 0.05 mm

SPECIFICATION

MATERIAL

Insulator: THERMAL PLASTIC, rated UL94V-0

Contacts: Copper alloy

Shell: Steel

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact area: 1u"~10u" Selective Gold

Solder tails area: 100u"~200u" Tin(Lead Free)

ELECTRICAL

Operation voltage: 250V Max.

Current rating: 2.5 Amps Max.


Contact resistance: 25 mohms initial

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC / minute

Temperature range: -55°C TO +105°C

Mating cycles: 500 insertions

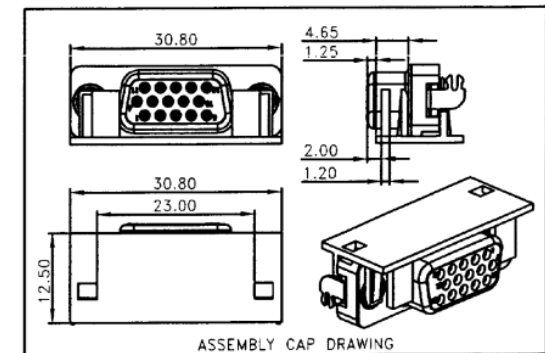

ASSEMBLY CAP DRAWING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

照片框

ORDER INFORMATION

HDR151-SNC15-15-LF

SERIES

LEADFREE

15WAY

CENTER HEIGHT 1.5mm

NUT

FEMALE

DESCRIPTION: D-SUB 15 PIN FEMALE R/A STANDARD TYPE
CENTER HEIGHT 1.5mm