
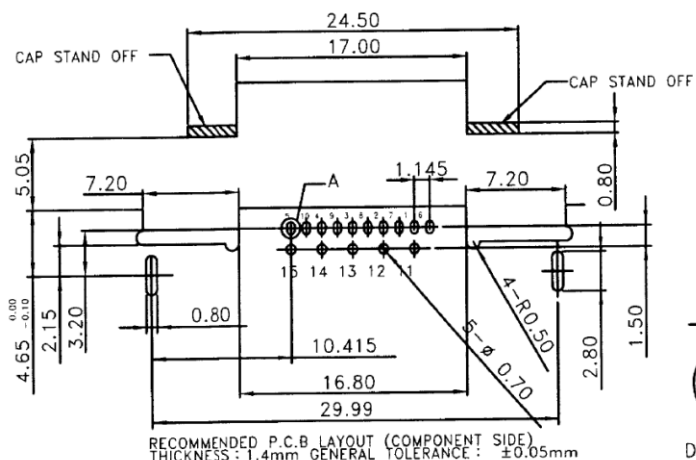
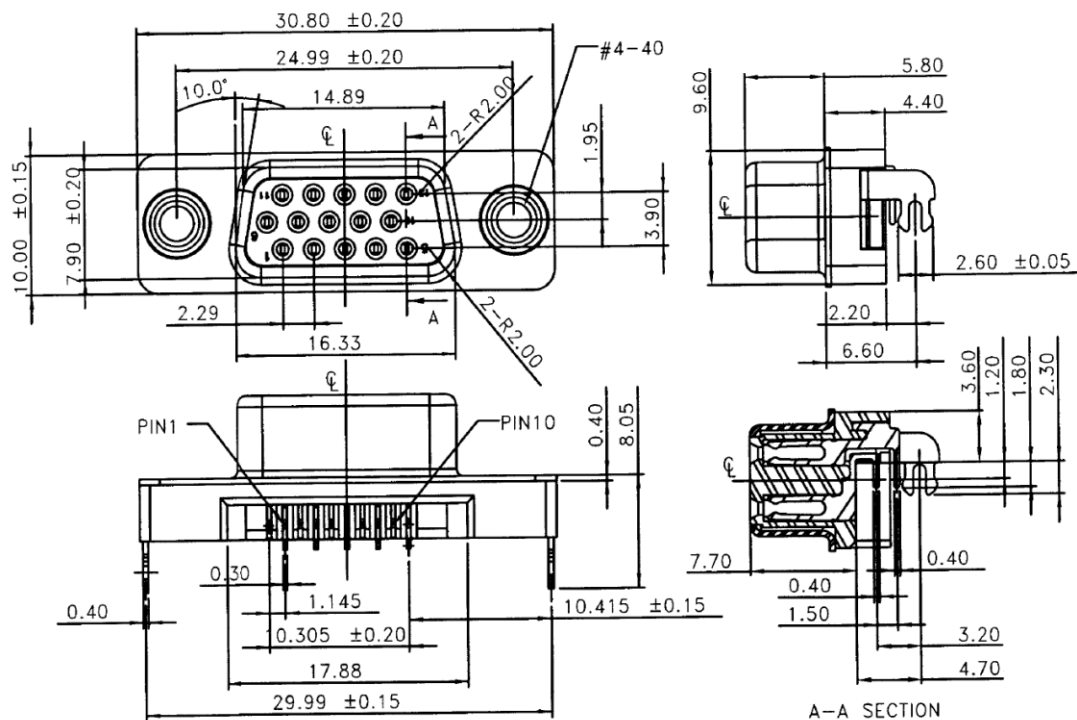


SPECIFICATION
MATERIAL
 Insulator: THERMAL PLASTIC, rated UL94V-0
 Contacts: Copper alloy
 Shell: Steel
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact area: Gold flash
 Solder tails area: 100u"~200u" Tin/Lead Free
ELECTRICAL
 Operation voltage: 250V Max.
 Current rating: 2.5 Amps Max.
 Contact resistance: 25 mohms initial
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC / minute
 Temperature range: -55°C TO +105°C
 Mating cycles: 500 insertions

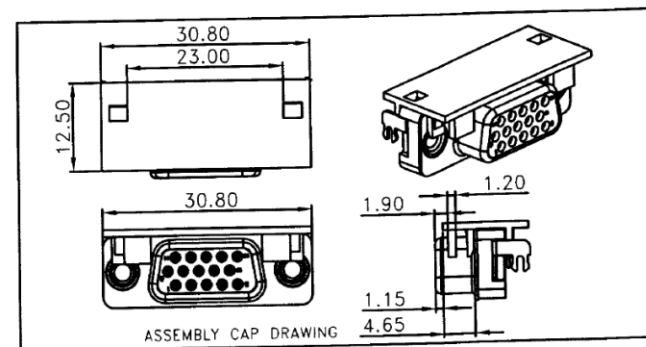

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDR151-SNRVCR-15-LF

SERIES

15

WAY

REEL

CAP

REVERSED

NUT

FEMALE

LEADFREE

DESCRIPTION:

DESCRIPTION: