
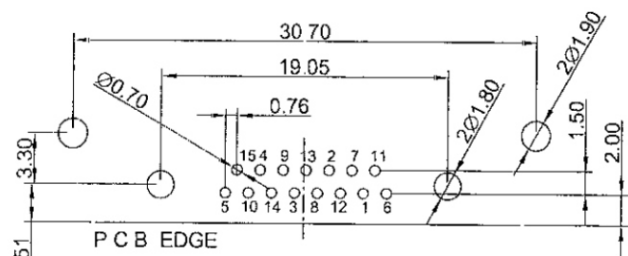


MATERIAL:
 INSULATOR : THERMOPLASTIC, UL 94V-0
 STANDARD : NYLON
 CONTACT : BRASS
 CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END
 WITH ENTIRE CONTACT NICKEL UNDERPLATED
 SHELL : STEEL
 BOARDLOCKS : BRASS, TIN PLATED
 RIVETED INSERT : BRASS NICKEL PLATED

SPECIFICATION:
 CURRENT RATING : 2.5 AMP MAX
 DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 1000M Ω MIN AT 500V DC
 CONTACT RESISTANCE : 20m Ω MAX
 TEMPERATURE : -55°C TO +105°C

HDR202-SN-15-LF
 LEADFREE
 RoHS Compliant

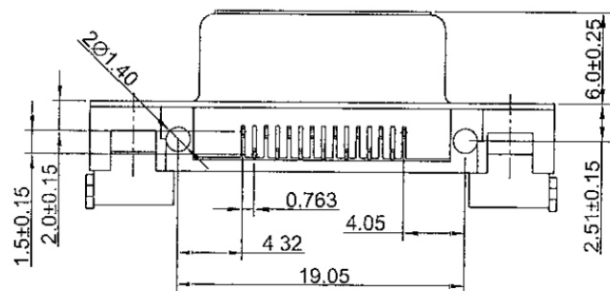

RECOMMENDED P.C.B HOLE LAYOUT
 COMPONENT SIDE VIEW(TOLERANCE ±0.05mm)

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. HDR202-SN-15

DWG NO. HDR202-SN-15

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

