


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(I)

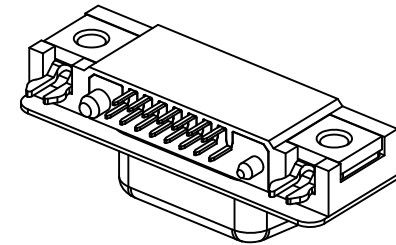

SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500V AC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
 - Housing:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Boardlock:Copper Alloy.
 - Rivet:Copper Alloy.
2. FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Area.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Rivet:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ± 0.25


DATE

.XXX, ± 0.13

ANG, ±

SIZE A4

PPOJECTION



ORDER INFORMATION

HDR25-SN-15-LF

| | |
|--------|----------|
| SERIES | LEADFREE |
| | 15WAY |
| NUT | |
| FEMALE | |

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: D-SUB 15 FEMALE HIGH DENSITY CONNECTOR DIP SOLDER, RIGHT ANGLE